

## LORO-X COMPOSITE PIPE WITH 1 SOCKET

## 3000 MM DN 100

LORO-Composite Pipe 3000 mm DN 100

### Description

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 3000 mm long, DN100




### Données de l'article

|                                |                             |
|--------------------------------|-----------------------------|
| Code EAN                       | 4038088024423               |
| Classe ETIM                    | EC010225                    |
| Diamètre nominal               | DN 100                      |
| Longueur/degré nominal         | 3000                        |
| Dimensions extérieures (HxLxP) | 133 x 133 x 3070 mm         |
| Poids                          | 44,00 Kg (STK)              |
| Groupe de produits             | 3                           |
| Numéro tarifaire douanier      | 73063012                    |
| Matériau / Couleur             | Stahl feuerverzinkt, Silber |

### Note d'utilisation

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

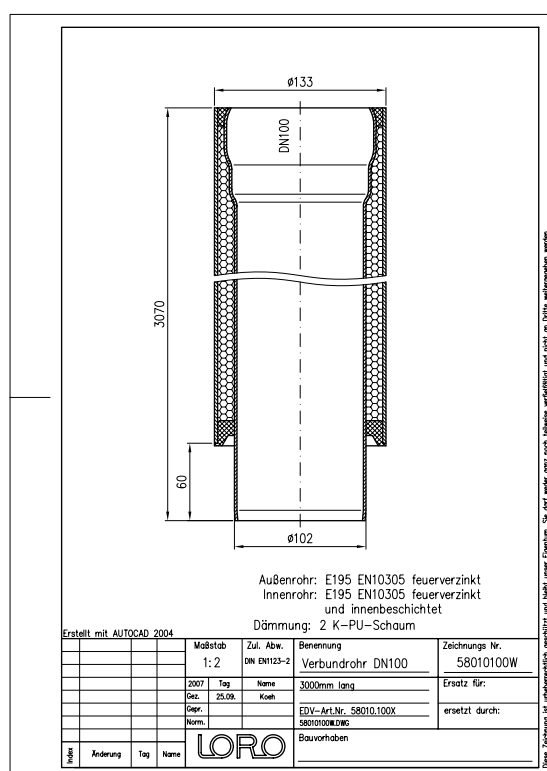

### Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)