

## LORO-X COMPOSITE PIPE WITH 1 SOCKET

## 3000 MM DN 125

**LORO-Composite Pipe 3000 mm DN 125**

### Kuvaus

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 3000 mm long, DN125




### Tuotetiedot

|                      |                             |
|----------------------|-----------------------------|
| EAN-koodi            | 4038088024430               |
| ETIM-luokka          | EC010225                    |
| Nimellishalkaisija   | DN 125                      |
| Nimellispituus/-aste | 3000                        |
| Ulkomitat (KxLxS)    | 168 x 168 x 3075 mm         |
| Paino                | 65,00 Kg (STK)              |
| Tuoteryhmä           | 3                           |
| Tullitariffin numero | 73063018                    |
| Materiaali / Väri    | Stahl feuerverzinkt, Silber |

### Käyttöohje

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

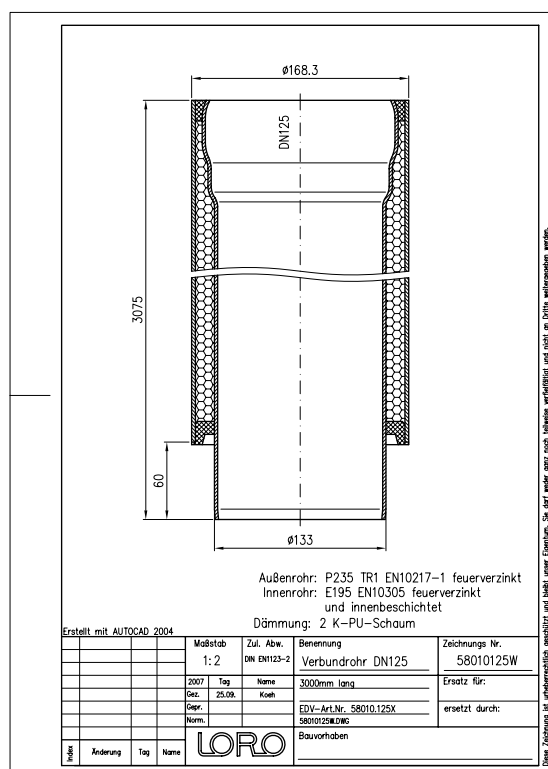

### Lataukset



Alles online

[Asennusohje \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Mittapiirustus \(PDF\)](#)
[CAD \(DWG\)](#)
[Esite \(PDF\)](#)