

## LORO-X COMPOSITE PIPE WITH 1 SOCKET 2000 MM DN 80

### LORO-Composite Pipe 2000 mm DN 80

#### Beskrivning

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 2000 mm long, DN 80




#### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kod             | 4038088049471               |
| ETIM-klass          | EC010225                    |
| Nominell diameter   | DN 80                       |
| Nominell längd/grad | 2000                        |
| Yttermått (HxBxL)   | 133 x 133 x 2060 mm         |
| Vikt                | 26,00 Kg (STK)              |
| Produktgrupp        | 3                           |
| Tullnummer          | 73063012                    |
| Material / Färg     | Stahl feuerverzinkt, Silber |

#### Användningsanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

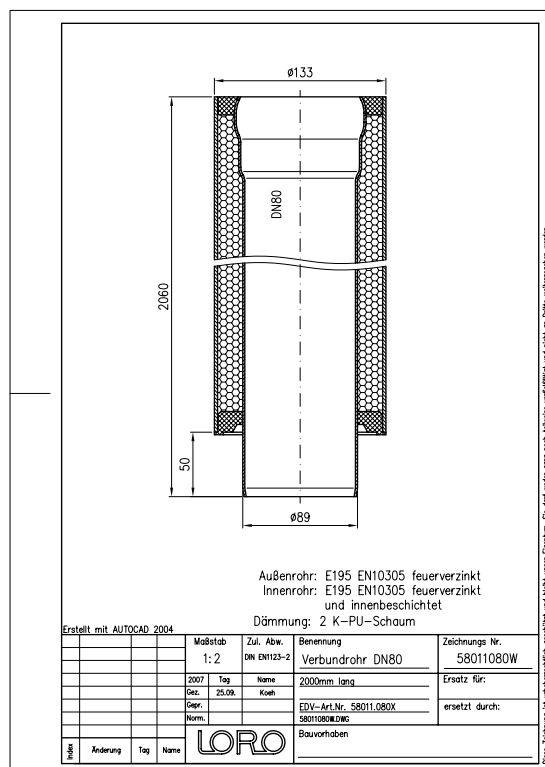

#### Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Måttitning \(PDF\)](#)
[CAD \(DWG\)](#)
[Broschyr \(PDF\)](#)