

## LORO-X COMPOSITE PIPE WITH 1 SOCKET 2000 MM DN 80

### LORO-Composite Pipe 2000 mm DN 80

#### Kuvaus

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 2000 mm long, DN 80




#### Tuotetiedot

|                      |                             |
|----------------------|-----------------------------|
| EAN-koodi            | 4038088049471               |
| ETIM-luokka          | EC010225                    |
| Nimellishalkaisija   | DN 80                       |
| Nimellispituus/-aste | 2000                        |
| Ulkomitat (KxLxS)    | 133 x 133 x 2060 mm         |
| Paino                | 26,00 Kg (STK)              |
| Tuoteryhmä           | 3                           |
| Tullitariffin numero | 73063012                    |
| Materiaali / Väri    | Stahl feuerverzinkt, Silber |

#### Käyttöohje

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

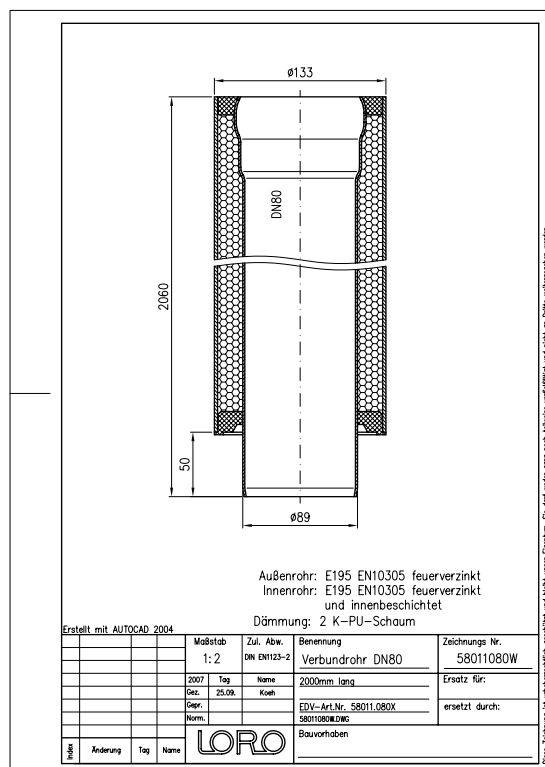

#### Lataukset



Alles online

[Asennusohje \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Mittapiirustus \(PDF\)](#)

[CAD \(DWG\)](#)

[Esite \(PDF\)](#)