


LORO-X COMPOSITE PIPE WITH 1 SOCKET

2000 MM DN 80

LORO-Composite Pipe 2000 mm DN 80

Opis

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 2000 mm long, DN 80

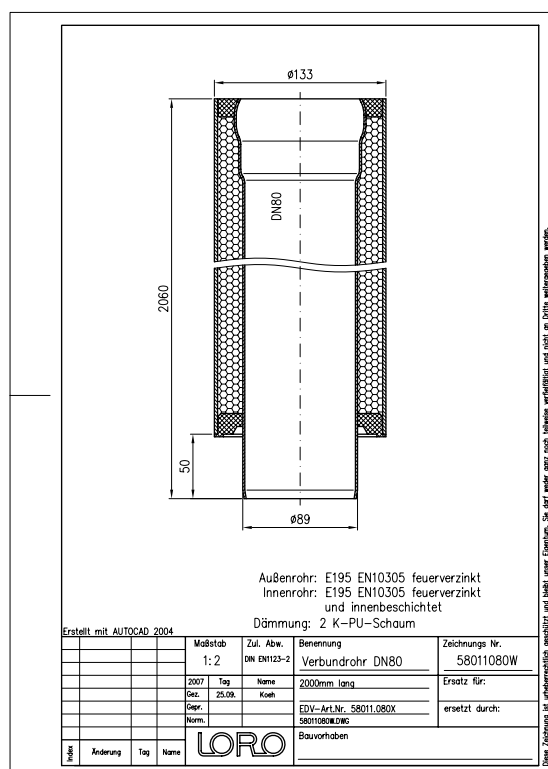

Dane artykułu

Kod EAN 4038088049471

Klasa ETIM EC010225

Średnica nominalna DN 80

Długość/stopień nominalny 2000

Wymiary zewnętrzne 133 x 133 x 2060 mm (WxSxD)

Waga 26,00 Kg (STK)

Grupa produktów 3

Numer taryfy celnej 73063012

Materiał / Kolor Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Rysunek wymiarowy \(PDF\)](#)
[CAD \(DWG\)](#)
[Broszura \(PDF\)](#)