## LORO-X COMPOSITE PIPE WITH 1 SOCKET 1000 MM DN 32

**LORO-Composite Pipe 1 socket 1000 mm DN 32**

### Text pro výběrové řízení

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 1000 mm long, DN32

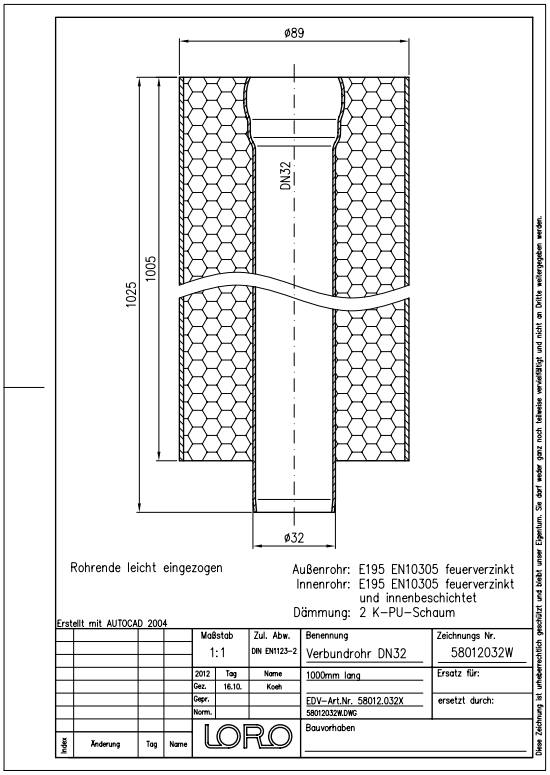


### Údaje o artiklu

| | |
|---|---|
| **EAN kód** | **4038088067819** |
| **ETIM třída** | **EC010225** |
| **Jmenovitý průměr** | **DN 32** |
| **Jmenovitá délka/stupeň** | **1000** |
| **Vnější rozměry (VxŠxD)** | **89 x 89 x 1025 mm** |
| **Hmotnost** | **5,00 Kg (STK)** |
| **Skupina produktů** | **3** |
| **Celní sazebník** | **73063012** |
| **Materiál / Barva** | **Stahl feuerverzinkt, Silber** |

### Pokyny k použití

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

### Ke stažení

Alles online

Návod k instalaci (PDF)
Výkres rozměrů (PDF)
Prospekt (PDF)
CAD 2D (DXF)
CAD (DWG)
BIM IFC4 (parametrisch)