

LORO-X COMPOSITE PIPE WITH 1 SOCKET

1000 MM DN 32

LORO-Composite Pipe 1 socket 1000 mm DN 32

Texte de prescription

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 1000 mm long, DN32




Données de l'article

Code EAN	4038088067819
Classe ETIM	EC010225
Diamètre nominal	DN 32
Longueur/degré nominal	1000
Dimensions extérieures (HxLxP)	89 x 89 x 1025 mm
Poids	5,00 Kg (STK)
Groupe de produits	3
Numéro tarifaire douanier	73063012
Matériau / Couleur	Stahl feuerverzinkt, Silber

Note d'utilisation

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

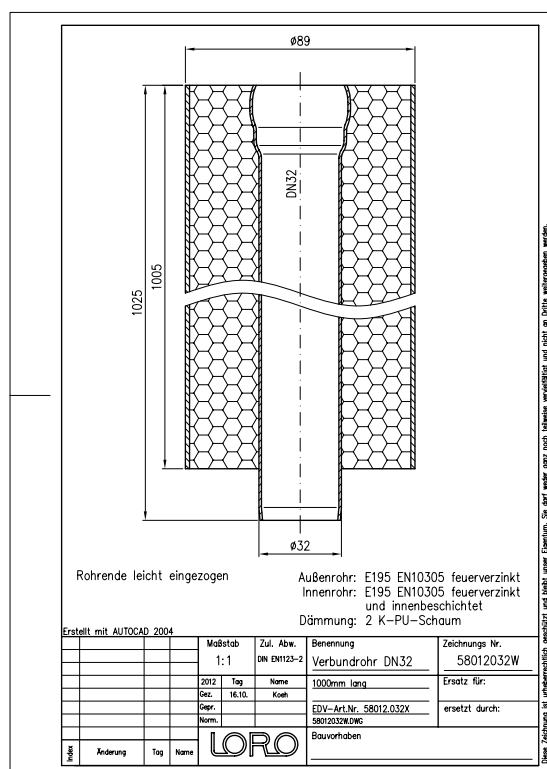

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM IFC4 \(paramétrisch\)](#)