

## LORO-X COMPOSITE PIPE WITH 1 SOCKET

1000 MM DN 40

LORO-Composite Pipe 1000 mm DN 40

### Popis

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 1000 mm long, DN40




### Údaje o artiklu

|                        |                             |
|------------------------|-----------------------------|
| EAN kód                | 4038088049501               |
| ETIM třída             | EC010225                    |
| Jmenovitý průměr       | DN 40                       |
| Jmenovitá délka/stupeň | 1000                        |
| Vnější rozměry (VxŠxD) | 89 x 89 x 1030 mm           |
| Hmotnost               | 5,50 Kg (STK)               |
| Skupina produktů       | 3                           |
| Celní sazebník         | 73063012                    |
| Materiál / Barva       | Stahl feuerverzinkt, Silber |

### Pokyny k použití

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

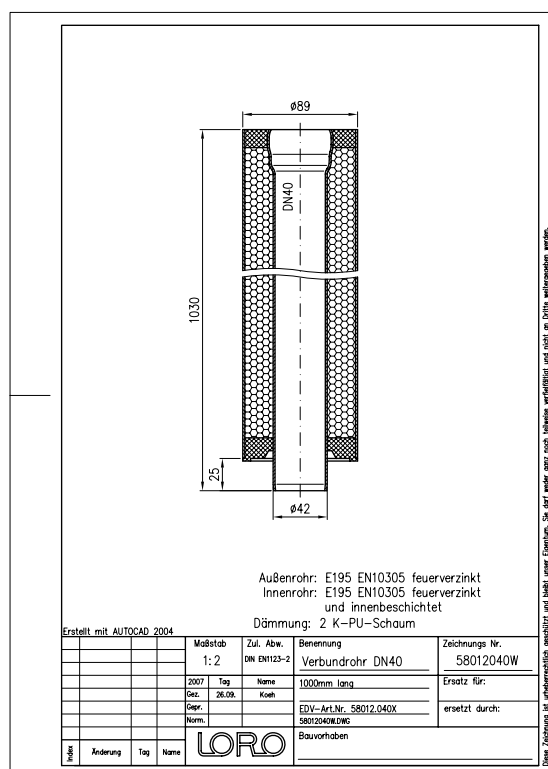

### Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Výkres rozměrů \(PDF\)](#)  
[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)