

## LORO-X COMPOSITE PIPE WITH 1 SOCKET 1000 MM DN 50

### LORO-Composite Pipe 1000 mm DN 50

#### Beskrivelse

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 1000 mm long, DN50




#### Artikkeldata

|                       |                             |
|-----------------------|-----------------------------|
| EAN-kode              | 4038088024508               |
| ETIM-klasse           | EC010225                    |
| Nominell diameter     | DN 50                       |
| Nominell lengde/grad  | 1000                        |
| Utvendige mål (HxBxL) | 89 x 89 x 1038 mm           |
| Vekt                  | 6,30 Kg (STK)               |
| Produktgruppe         | 3                           |
| Tolltariffnummer      | 73063012                    |
| Materiale / Farge     | Stahl feuerverzinkt, Silber |

#### Bruksanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

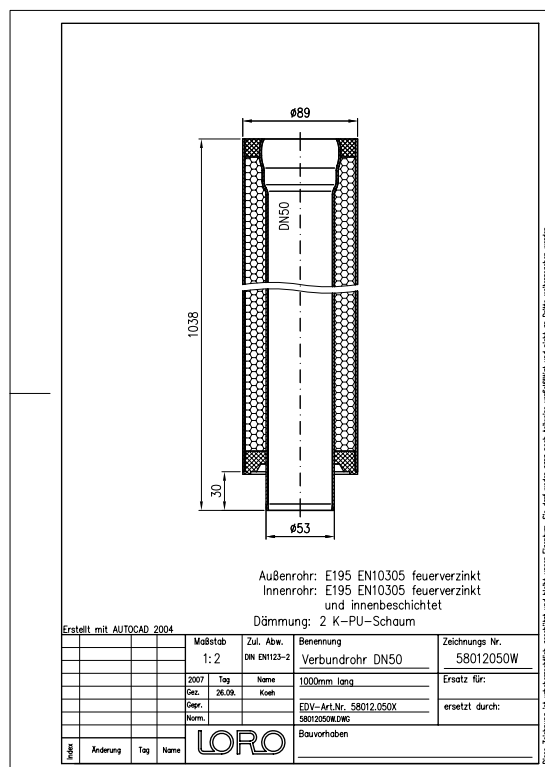

#### Nedlasteringer



Alles online

[Monteringsanvisning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Måltegning \(PDF\)](#)
[CAD \(DWG\)](#)
[Brosjyre \(PDF\)](#)