

## LORO-X COMPOSITE PIPE WITH 1 SOCKET

## 1000 MM DN 125

### LORO-Composite Pipe 1000 mm DN 125

#### Opis

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 1000 mm long, DN125




#### Dane artykułu

|                            |                             |
|----------------------------|-----------------------------|
| Kod EAN                    | 4038088024539               |
| Klasa ETIM                 | EC010225                    |
| Średnica nominalna         | DN 125                      |
| Długość/stopień nominalny  | 1000                        |
| Wymiary zewnętrzne (WxSxD) | 168 x 168 x 1075 mm         |
| Waga                       | 24,00 Kg (STK)              |
| Grupa produktów            | 3                           |
| Numer taryfy celnej        | 73063018                    |
| Materiał / Kolor           | Stahl feuerverzinkt, Silber |

#### Wskazówki dotyczące użytkowania

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

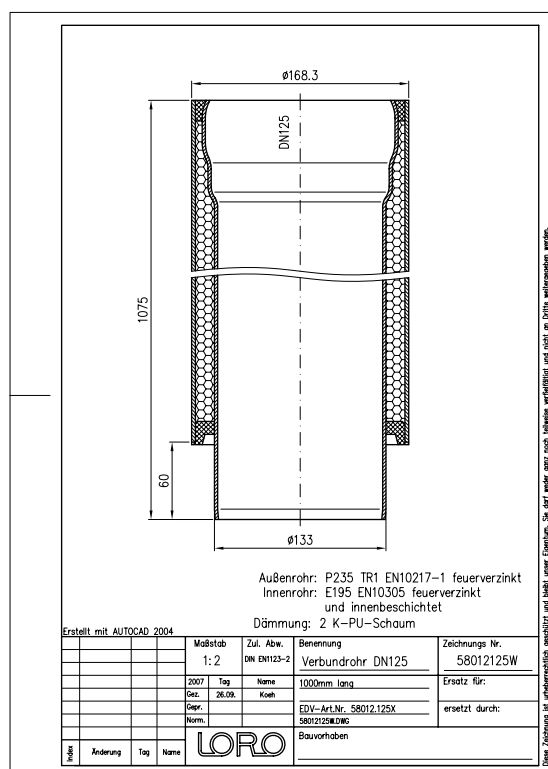

#### Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Rysunek wymiarowy \(PDF\)](#)
[CAD \(DWG\)](#)
[Broszura \(PDF\)](#)