

## LORO-X COMPOSITE PIPE WITH 1 SOCKET

1000 MM DN 125

LORO-Composite Pipe 1000 mm DN 125

### Descripción

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 1000 mm long, DN125




### Datos del artículo

|                            |                             |
|----------------------------|-----------------------------|
| Código EAN                 | 4038088024539               |
| Clase ETIM                 | EC010225                    |
| Diámetro nominal           | DN 125                      |
| Longitud/grado nominal     | 1000                        |
| Medidas exteriores (AxAxL) | 168 x 168 x 1075 mm         |
| Peso                       | 24,00 Kg (STK)              |
| Grupo de productos         | 3                           |
| Número de arancel aduanero | 73063018                    |
| Material / Color           | Stahl feuerverzinkt, Silber |

### Nota de uso

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

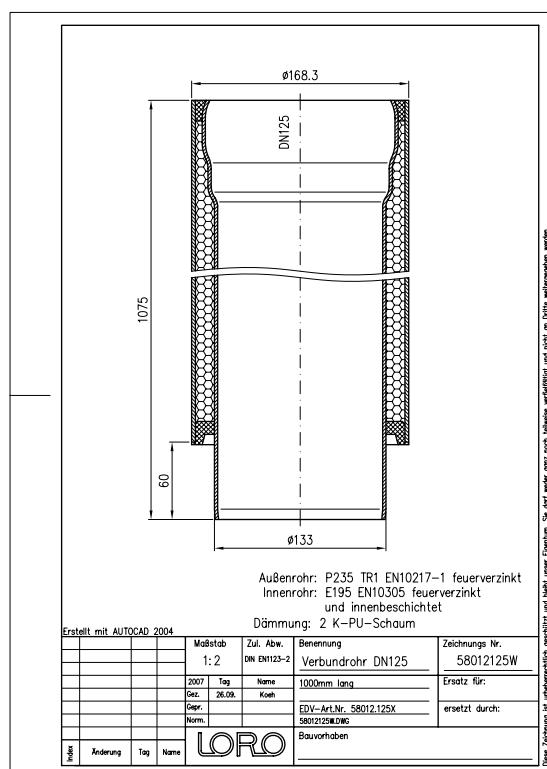

### Descargas



Alles online

[Instrucciones de instalación \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Dibujo dimensional \(PDF\)](#)  
[CAD \(DWG\)](#)

[Folleto \(PDF\)](#)