

LORO-X COMPOSITE PIPE WITH 1 SOCKET

500 MM DN 32

LORO-Composite Pipe 1 socket 500 mm DN 32

Text pentru caietul de sarcini

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 500 mm long, DN32




Date articol

Cod EAN	4038088067833
Clasă ETIM	EC010225
Diametru nominal	DN 32
Lungime/grad nominal	500
Dimensiuni exterioare (îxLxA)	89 x 89 x 525 mm
Greutate	2,50 Kg (STK)
Grupă de produse	3
Număr tarif vamal	73063012
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

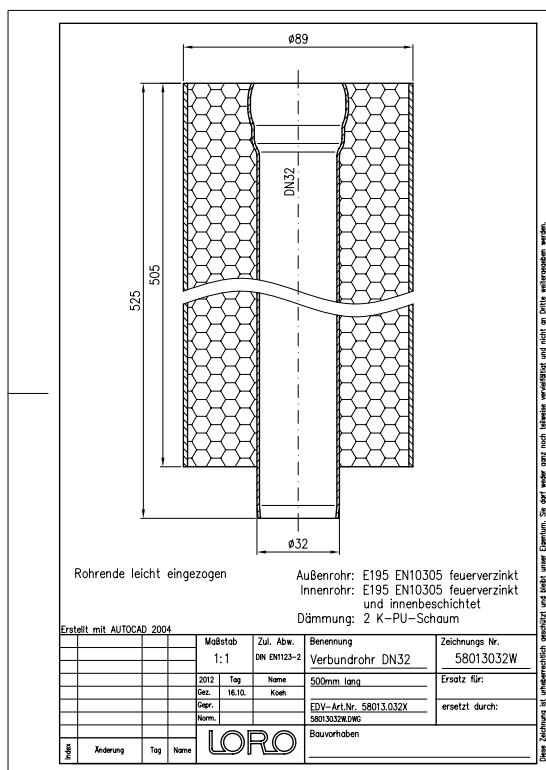

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Desen CAD \(PDF\)](#)
[CAD \(DWG\)](#)

[Broșură \(PDF\)](#)
[BIM IFC4 \(parametric\)](#)