

LORO-X COMPOSITE PIPE WITH 1 SOCKET 500 MM DN 32

LORO-Composite Pipe 1 socket 500 mm DN 32

Tekst za troškovnik

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 500 mm long, DN32




Podaci o artiklu

EAN kod	4038088067833
ETIM klasa	EC010225
Nazivni promjer	DN 32
Nazivna duljina/stupanj	500
Vanjske mjere (VxŠxD)	89 x 89 x 525 mm
Težina	2,50 Kg (STK)
Grupa proizvoda	3
Carinski tarifni broj	73063012
Materijal / Boja	Stahl feuerverzinkt, Silber

Napomena za upotrebu

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

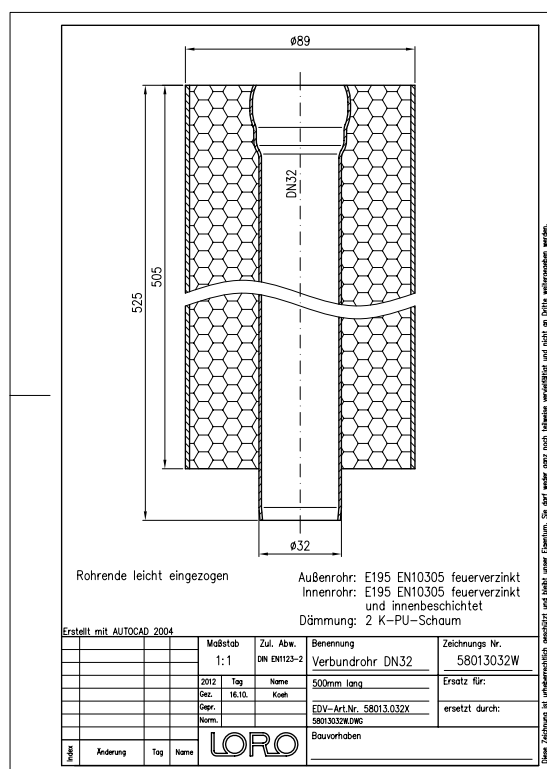

Preuzimanja



Alles online

[Upute za ugradnju \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Dimenzijski crtež \(PDF\)](#)

[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)

[BIM IFC4 \(parametrisch\)](#)