

LORO-X COMPOSITE PIPE WITH 1 SOCKET

500 MM DN 32

LORO-Composite Pipe 1 socket 500 mm DN 32

Voce di capitolato

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 500 mm long, DN32



Dati articolo

Codice EAN 4038088067833

Classe ETIM EC010225

Diametro nominale DN 32

Lunghezza/grado nominale 500

Misure esterne (AxLxP) 89 x 89 x 525 mm

Peso 2,50 Kg (STK)


Gruppo prodotti 3

Numero tariffa doganale 73063012

Materiale / Colore Stahl feuerverzinkt, Silber

Note d'uso

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

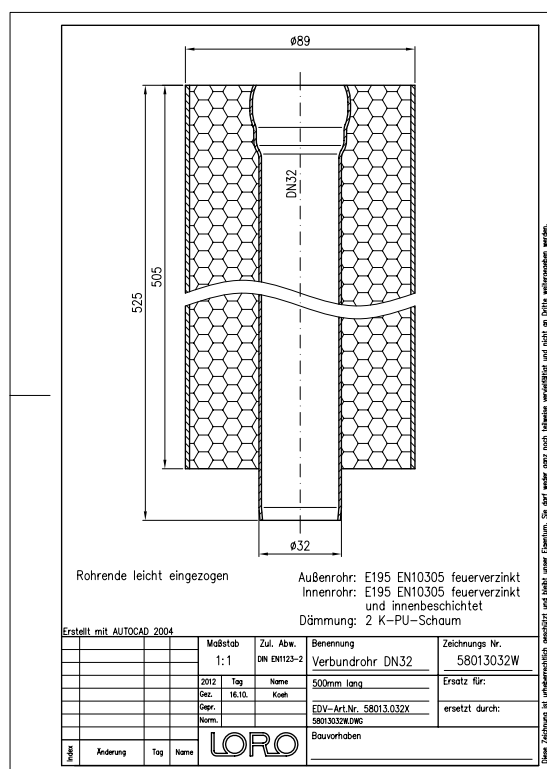

Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Disegno dimensionale \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)

[BIM IFC4 \(parametrico\)](#)