LORO-X COMPOSITE PIPE WITH 1 SOCKET 500 MM DN 50

LORO multilayer pipe 500 mm DN 50

Описание

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 500 mm long, DN50

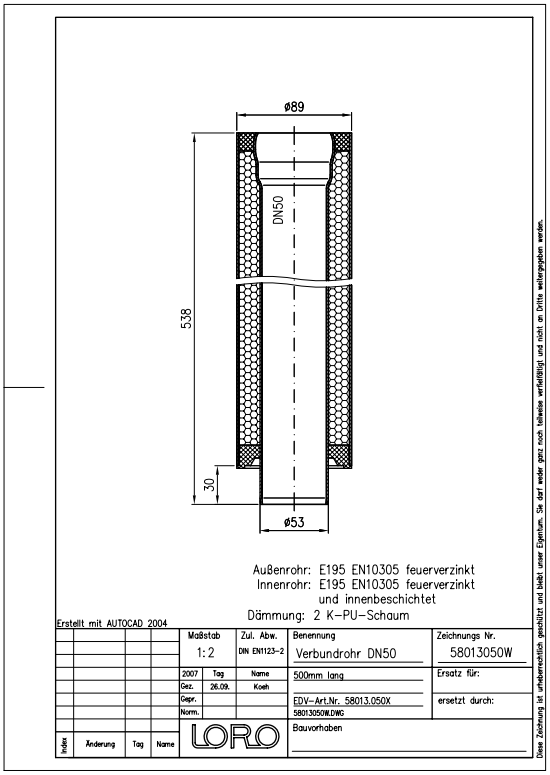

Данни за артикула

EAN код	4038088024553
ETIM клас	EC010225
Номинален диаметър	DN 50
Номинална дължина/градус	500
Външни размери (ВхШхД)	89 x 89 x 538 mm
Тегло	3,50 Kg (STK)
Продуктова група	3
Митнически тарифен номер	73063012
Материал / Цвят	Stahl feuerverzinkt, Silber

Забележка за употреба

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Изтегляния

Инструкция за монтаж (PDF)
CAD 2D (DXF)
CAD чертеж (PDF)
CAD (DWG)
Брошура (PDF)

Alles online