

LORO-X COMPOSITE PIPE WITH 1 SOCKET

250 MM DN 32

LORO-Composite Pipe 1 socket 250 mm DN 32

Besedilo za popis del

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 250 mm long, DN32




Podatki o izdelku

EAN koda	4038088067840
ETIM razred	EC010225
Nazivni premer	DN 32
Nazivna dolžina/stopinja	250
Zunanje mere (VxŠxD)	89 x 89 x 275 mm
Teža	1,40 Kg (STK)
Skupina izdelkov	3
Carinska tarifna številka	73063012
Material / Barva	Stahl feuerverzinkt, Silber

Opomba za uporabo

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

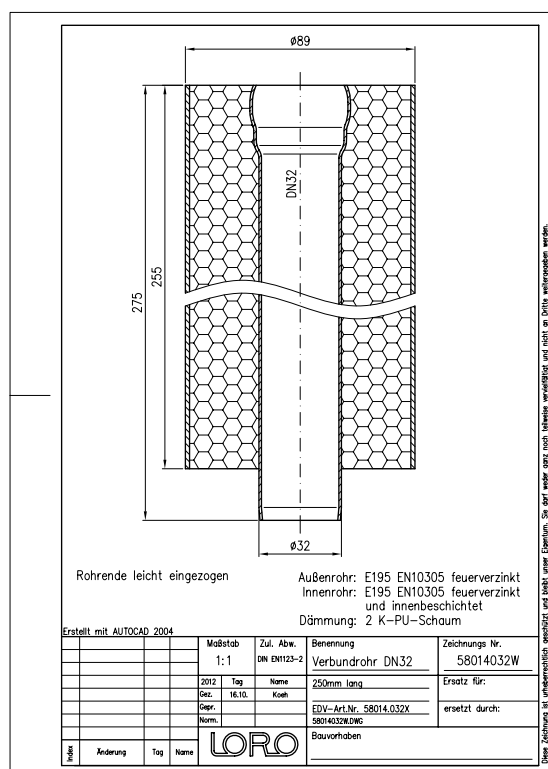

Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)
[CAD 2D \(DXF\)](#)

[Merska risba \(PDF\)](#)
[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)
[BIM IFC4 \(parametrisch\)](#)