

LORO-X COMPOSITE PIPE WITH 1 SOCKET

250 MM DN 32

LORO-Composite Pipe 1 socket 250 mm DN 32

Tekst przetargowy

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 250 mm long, DN32




Dane artykułu

Kod EAN	4038088067840
Klasa ETIM	EC010225
Średnica nominalna	DN 32
Długość/stożek nominalny	250
Wymiary zewnętrzne (WxSxD)	89 x 89 x 275 mm
Waga	1,40 Kg (STK)
Grupa produktów	3
Numer taryfy celnej	73063012
Materiał / Kolor	Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

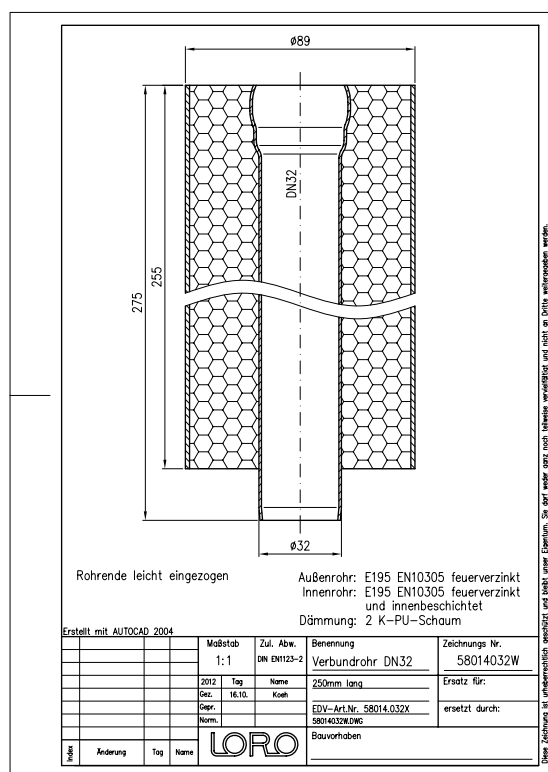

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Rysunek wymiarowy \(PDF\)](#)
[CAD \(DWG\)](#)
[Broszura \(PDF\)](#)
[BIM IFC4 \(parametryczny\)](#)