LORO-X COMPOSITE PIPE WITH 1 SOCKET 250 MM DN 32

LORO-Composite Pipe 1 socket 250 mm DN 32

Texto de licitación

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 250 mm long, DN32

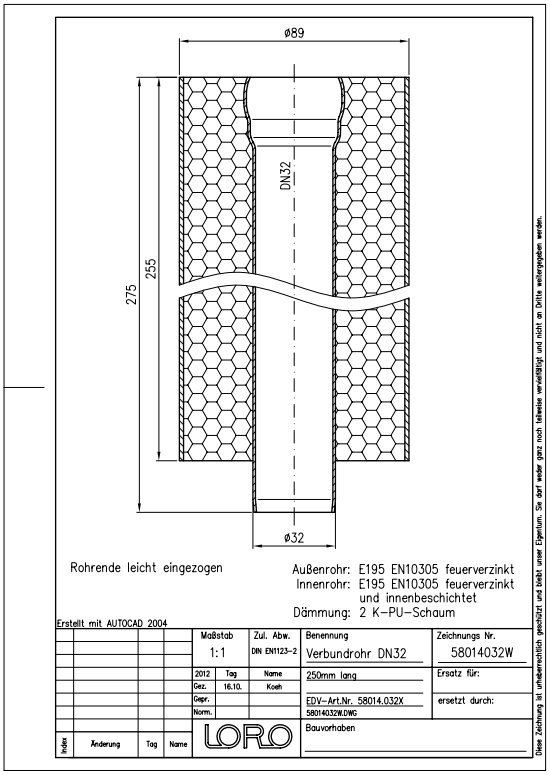

Datos del artículo

Código EAN	**4038088067840**
Clase ETIM	**EC010225**
Diámetro nominal	**DN 32**
Longitud/grado nominal	**250**
Medidas exteriores (AxAxL)	**89 x 89 x 275 mm**
Peso	**1,40 Kg (STK)**
Grupo de productos	**3**
Número de arancel aduanero	**73063012**
Material / Color	**Stahl feuerverzinkt, Silber**

Nota de uso

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Descargas

Alles online

Instrucciones de instalación (PDF)
Dibujo dimensional (PDF)
Folleto (PDF)
CAD 2D (DXF)
CAD (DWG)
BIM IFC4 (parametrisch)