

## LORO-X COMPOSITE PIPE WITH 1 SOCKET 250 MM DN 40

### LORO-Composite Pipe 250 mm DN 40

#### Beskrivelse

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 250 mm long, DN40




#### Artikeldata

|                        |                             |
|------------------------|-----------------------------|
| EAN-kode               | 4038088049563               |
| ETIM Klasse            | EC010225                    |
| Nominal diameter       | DN 40                       |
| Nominal<br>længde/grad | 250                         |
| Ydermål (HxBxL)        | 89 x 89 x 280 mm            |
| Vægt                   | 1,40 Kg (STK)               |
| Produktgruppe          | 3                           |
| Toldtarifnummer        | 73063012                    |
| Materiale / Farve      | Stahl feuerverzinkt, Silber |

#### Brugsanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

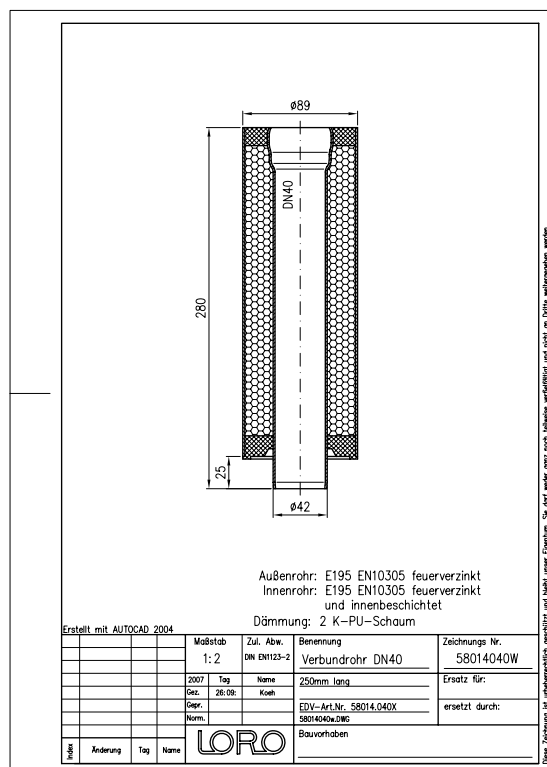

#### Downloads



Alles online

[Installationsvejledning \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Måltægning \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)