


LORO-X COMPOSITE PIPE WITH 1 SOCKET

250 MM DN 70

LORO multilayer pipe 250 mm DN 70

Opis

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 250 mm long, DN70

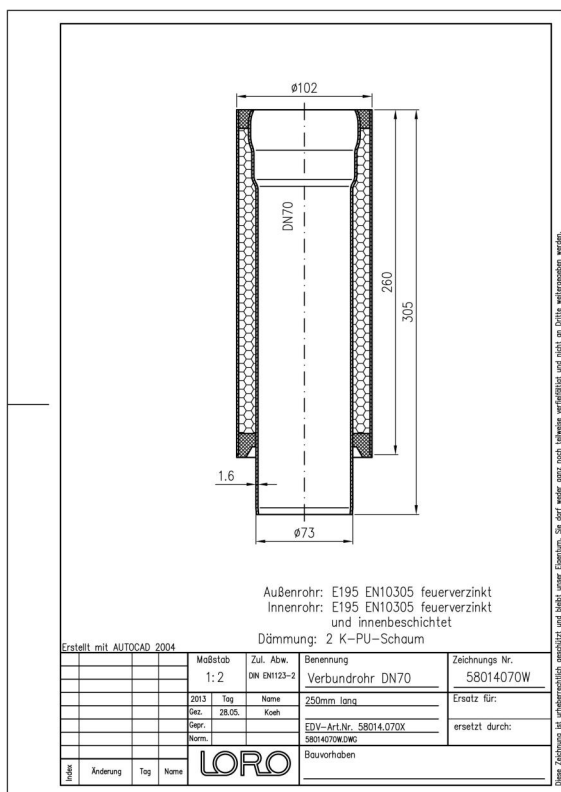

Dane artykułu

Kod EAN 4038088024614

Klasa ETIM EC010225

Średnica nominalna DN 70

Długość/stopień nominalny 250

Wymiary zewnętrzne 102 x 102 x 305 mm (WxSxD)

Waga 2,30 Kg (STK)

Grupa produktów 3

Numer taryfy celnej 73063012

Materiał / Kolor Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Rysunek wymiarowy \(PDF\)](#)

[CAD \(DWG\)](#)

[Broszura \(PDF\)](#)