

## LORO-X COMPOSITE PIPE WITH 1 SOCKET 250 MM DN 125

### LORO-Composite pipe 250 mm DN 125

#### Opis

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 250 mm long, DN125




#### Podatki o izdelku

|                           |                             |
|---------------------------|-----------------------------|
| EAN koda                  | 4038088024638               |
| ETIM razred               | EC010225                    |
| Nazivni premer            | DN 125                      |
| Nazivna dolžina/stopinja  | 250                         |
| Zunanje mere (VxŠxD)      | 168 x 168 x 325 mm          |
| Teža                      | 6,70 Kg (STK)               |
| Skupina izdelkov          | 3                           |
| Carinska tarifna številka | 73063018                    |
| Material / Barva          | Stahl feuerverzinkt, Silber |

#### Opomba za uporabo

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

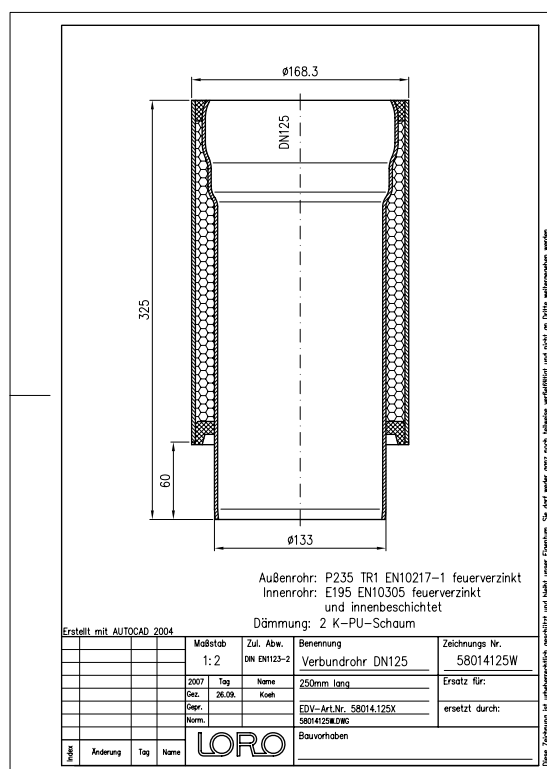

#### Prenosi



Alles online

[Navodila za vgradnjo \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Merska risba \(PDF\)](#)  
[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)