LORO-X COMPOSITE PIPE WITH 1 SOCKET 1500 MM DN 32

LORO-Composite Pipe 1.500 mm DN 32

Beskrivningstext

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 1500 mm long, DN32

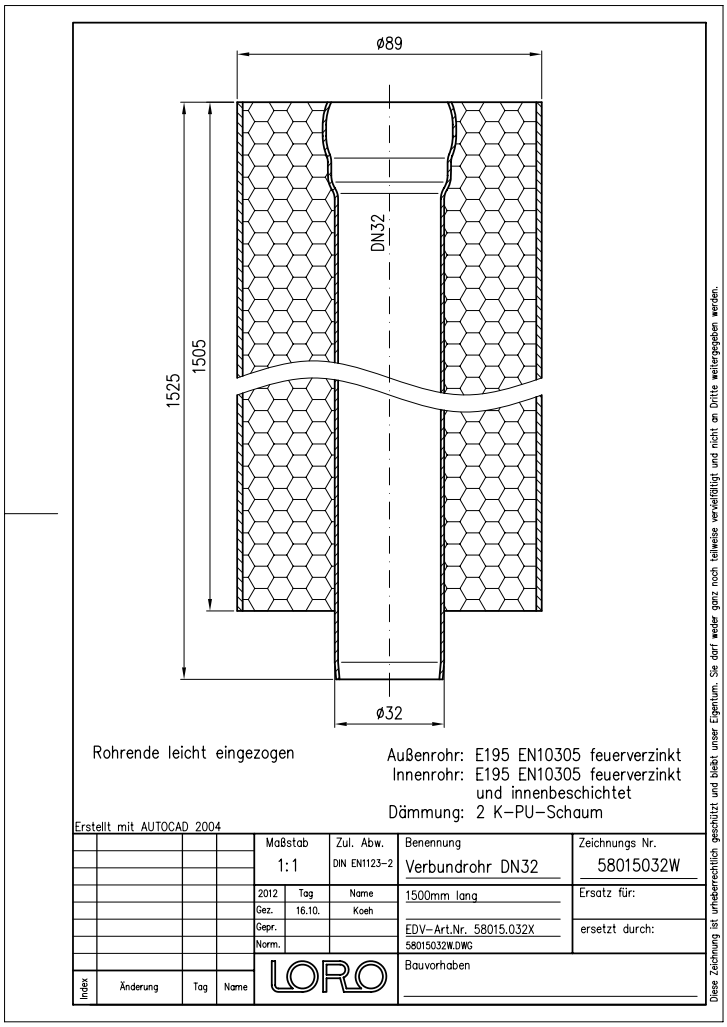

Artikeldata

EAN-kod	4038088067802
ETIM-klass	EC010225
Nominell diameter	DN 32
Nominell längd/grad	1500
Yttermått (HxBxL)	89 x 89 x 1525 mm
Vikt	7,50 Kg (STK)
Produktgrupp	3
Tullnummer	73063012
Material / Färg	Stahl feuerverzinkt, Silber

Användningsanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Nedladdningar

Monteringsanvisning (PDF)
CAD 2D (DXF)
Måttritning (PDF)
CAD (DWG)
Broschyr (PDF)

Alles online