

LORO-X COMPOSITE PIPE WITH 1 SOCKET 1500 MM DN 40

LORO-Composite Pipe 1500 mm DN 40

Beschrijving

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 1500 mm long, DN40



Artikelgegevens

EAN-code 4038088049488

ETIM Klasse EC010225

Nominale diameter DN 40

Nominale lengte/graad 1500

Buitenafmetingen (HxBxL) 89 x 89 x 1530 mm

Gewicht 7,60 Kg (STK)


Productgroep 3

Douanetariefnummer 73063012

Materiaal / Kleur Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

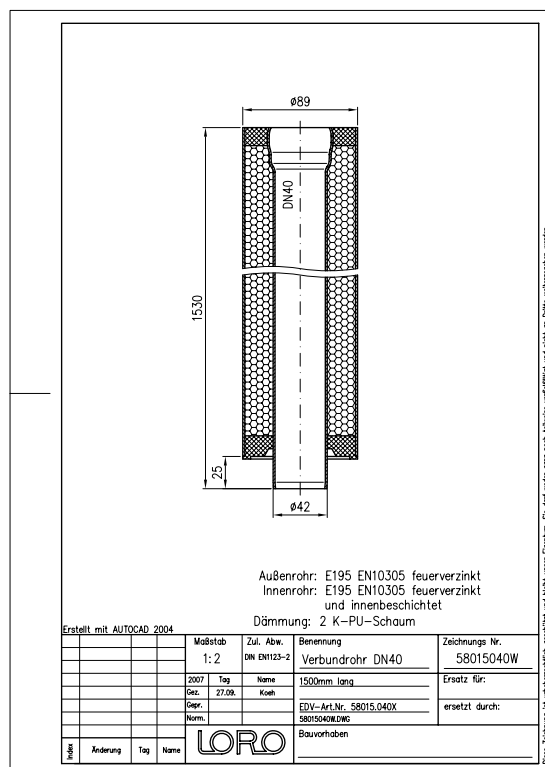

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Maattekening \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)