

## LORO-X COMPOSITE PIPE WITH 1 SOCKET

## 1500 MM DN 125

LORO multilayer pipe 1500 mm DN 125

### Descrizione

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 1500 mm long, DN125




### Dati articolo

|                          |                             |
|--------------------------|-----------------------------|
| Codice EAN               | 4038088024683               |
| Classe ETIM              | EC010225                    |
| Diametro nominale        | DN 125                      |
| Lunghezza/grado nominale | 1500                        |
| Misure esterne (AxLxP)   | 168 x 168 x 1575 mm         |
| Peso                     | 36,00 Kg (STK)              |
| Gruppo prodotti          | 3                           |
| Numero tariffa doganale  | 73063018                    |
| Materiale / Colore       | Stahl feuerverzinkt, Silber |

### Note d'uso

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

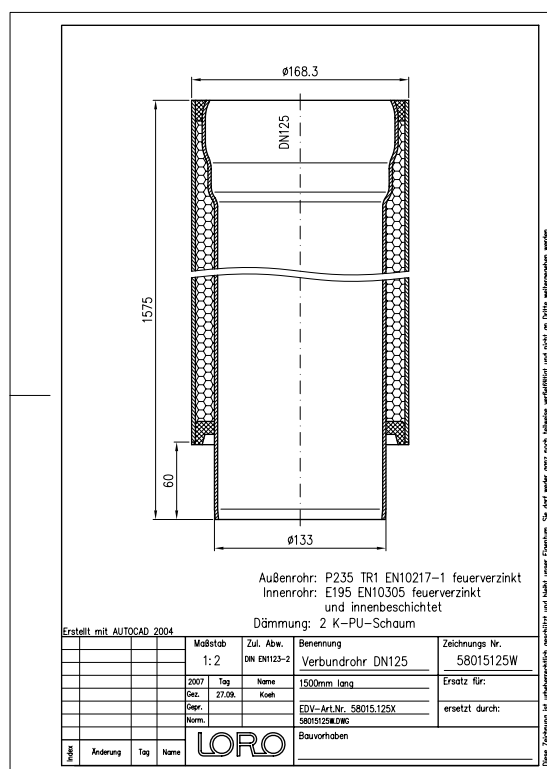

### Download



Alles online

[Istruzioni di installazione \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Disegno dimensionale \(PDF\)](#)  
[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)