

## LORO-X COMPOSITE PIPE WITH 1 SOCKET

## 1500 MM DN 150

LORO multilayer pipe 1500 mm DN 150

### Описание

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 1500 mm long, DN150




### Данни за артикула

|                          |                             |
|--------------------------|-----------------------------|
| ЕАН код                  | 4038088024690               |
| ЕТИМ клас                | EC010225                    |
| Номинален диаметър       | DN 150                      |
| Номинална дължина/градус | 1500                        |
| Външни размери (ВxШxД)   | 219 x 219 x 1580 mm         |
| Тегло                    | 45,00 Kg (STK)              |
| Продуктова група         | 3                           |
| Митнически тарифен номер | 73063018                    |
| Материал / Цвят          | Stahl feuerverzinkt, Silber |

### Забележка за употреба

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

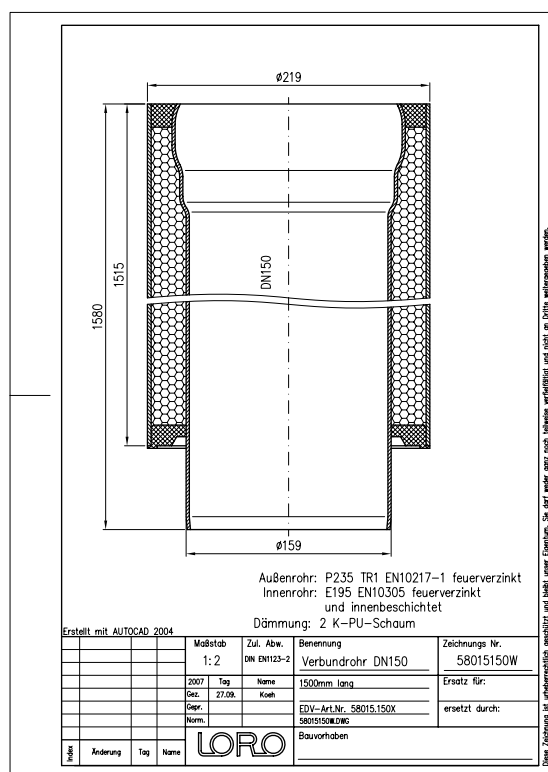

### Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[CAD чертеж \(PDF\)](#)

[CAD \(DWG\)](#)

[Брошура \(PDF\)](#)