
LORO-X COMPOSITE PIPE WITH 1 SOCKET 2500 MM DN 70

LORO-Composite Pipe 2500 mm DN 70

Beskrivelse

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 2500 mm long, DN70



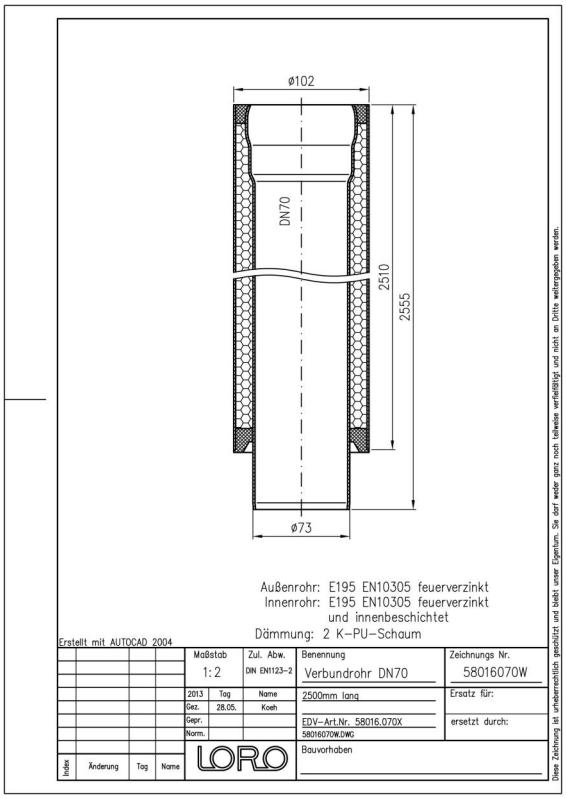

Artikkeldata

EAN-kode	**4038088024713**
ETIM-klasse	**EC010225**
Nominell diameter	**DN 70**
Nominell lengde/grad	**2500**
Utvendige mål (HxBxL)	**102 x 102 x 2555 mm**
Vekt	**22,50 Kg (STK)**
Produktgruppe	**3**
Tolltariffnummer	**73063012**
Materiale / Farge	**Stahl feuerverzinkt, Silber**

Bruksanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Nedlastinger

Alles online

Monteringsanvisning (PDF)
CAD 2D (DXF)
Måltegning (PDF)
CAD (DWG)
Brosjyre (PDF)