LORO-X COMPOSITE PIPE WITH 1 SOCKET 2500 MM DN 125

LORO-Composite Pipe 2500 mm DN 125

Opis

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 2500 mm long, DN125

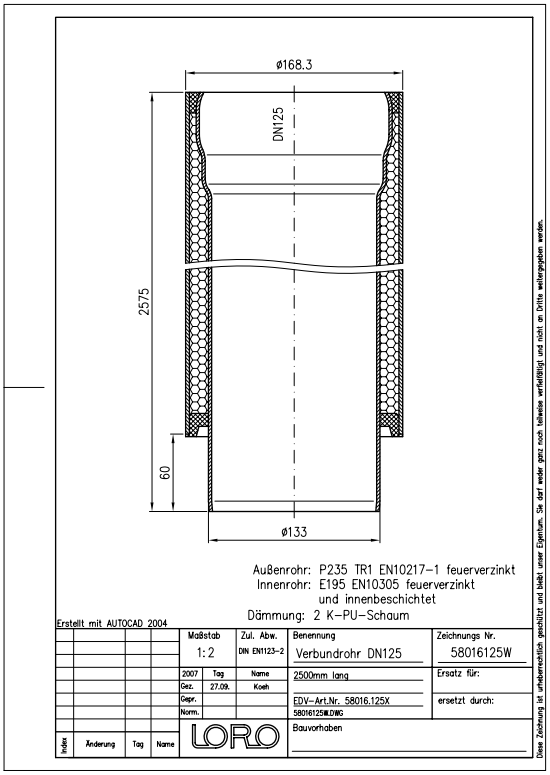

Podatki o izdelku

EAN koda	**4038088024737**
ETIM razred	**EC010225**
Nazivni premer	**DN 125**
Nazivna dolžina/stopinja	**2500**
Zunanje mere (VxŠxD)	**168 x 168 x 2575 mm**
Teža	**54,00 Kg (STK)**
Skupina izdelkov	**3**
Carinska tarifna številka	**73063018**
Material / Barva	**Stahl feuerverzinkt, Silber**

Opomba za uporabo

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Prenosi

Alles online

Navodila za vgradnjo (PDF)
CAD 2D (DXF)
Merska risba (PDF)
CAD (DWG)
Prospekt (PDF)