

LORO-X COMPOSITE PIPE WITH 1 SOCKET

4000 MM DN 50

LORO multilayer pipe 4000 mm DN 50

Descrizione

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 4000 mm long, DN50




Date articol

Cod EAN	4038088036174
Clasă ETIM	EC010225
Diametru nominal	DN 50
Lungime/grad nominal	4000
Dimensiuni exterioare (îxLxA)	89 x 89 x 4038 mm
Greutate	25,00 Kg (STK)
Grupă de produse	3
Număr tarif vamal	73063012
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

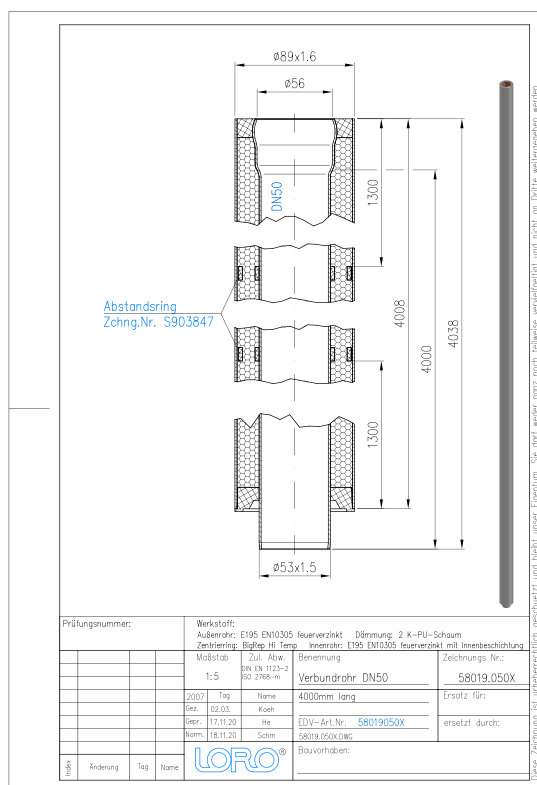

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Desen CAD \(PDF\)](#)

CAD 3D (DWG)

[Broșură \(PDF\)](#)

BIM 3D (STEP)