

## LORO-X COMPOSITE PIPE WITH 1 SOCKET

## 4000 MM DN 50

### LORO multilayer pipe 4000 mm DN 50

#### Leírás

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 4000 mm long, DN50




#### Cikkadatok

|                        |                             |
|------------------------|-----------------------------|
| EAN kód                | 4038088036174               |
| ETIM osztály           | EC010225                    |
| Névleges átmérő        | DN 50                       |
| Névleges hossz/fok     | 4000                        |
| Külső méretek (MxSzxH) | 89 x 89 x 4038 mm           |
| Súly                   | 25,00 Kg (STK)              |
| Termékcsoport          | 3                           |
| Vámtarifaszám          | 73063012                    |
| Anyag / Szín           | Stahl feuerverzinkt, Silber |

#### Használati megjegyzés

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

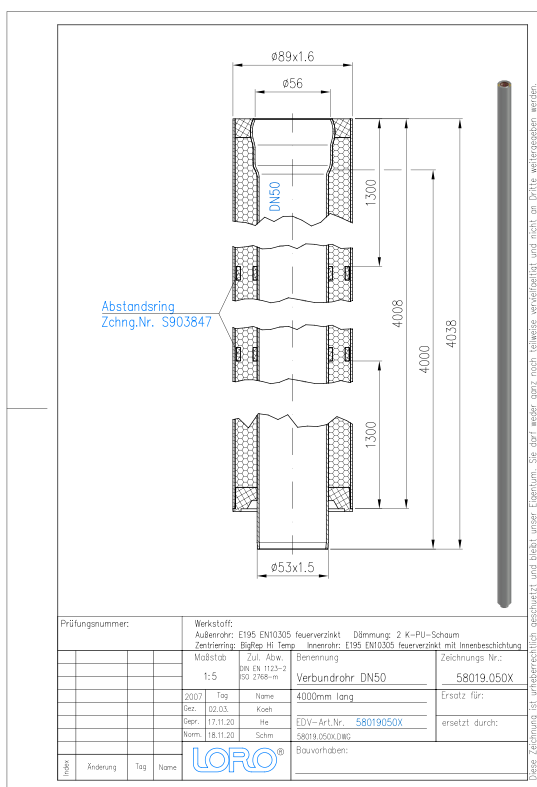

#### Letöltések



Alles online

[Szerelési útmutató \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Méterrajz \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Prospektus \(PDF\)](#)

[BIM 3D \(STEP\)](#)