

LORO-X COMPOSITE PIPE WITH 1 SOCKET 4000 MM DN 50

LORO multilayer pipe 4000 mm DN 50

Beschrijving

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 4000 mm long, DN50




Artikelgegevens

EAN-code	4038088036174
ETIM Klasse	EC010225
Nominale diameter	DN 50
Nominale lengte/graad	4000
Buitenafmetingen (HxBxL)	89 x 89 x 4038 mm
Gewicht	25,00 Kg (STK)
Productgroep	3
Douanetariefnummer	73063012
Materiaal / Kleur	Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

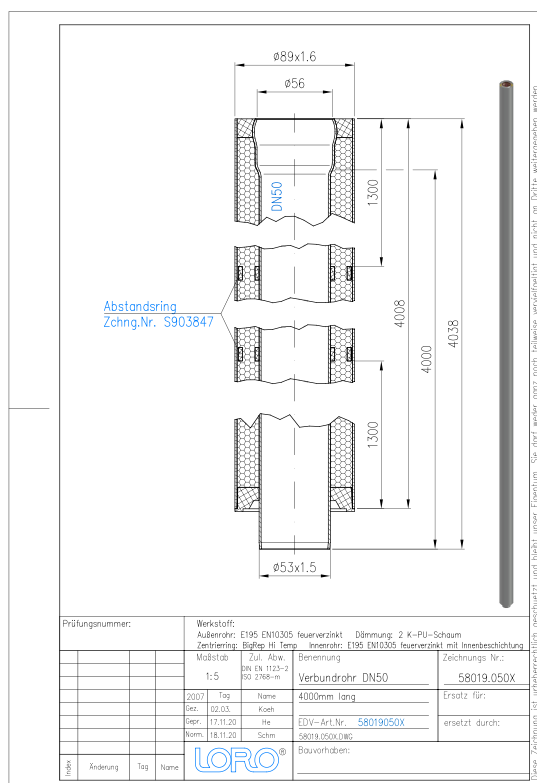

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Maattekening \(PDF\)](#)

CAD 3D (DWG)

[Brochure \(PDF\)](#)

BIM 3D (STEP)