LORO-X COMPOSITE PIPE WITH 1 SOCKET 4000 MM DN 50

LORO multilayer pipe 4000 mm DN 50

Beskrivelse

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 4000 mm long, DN50

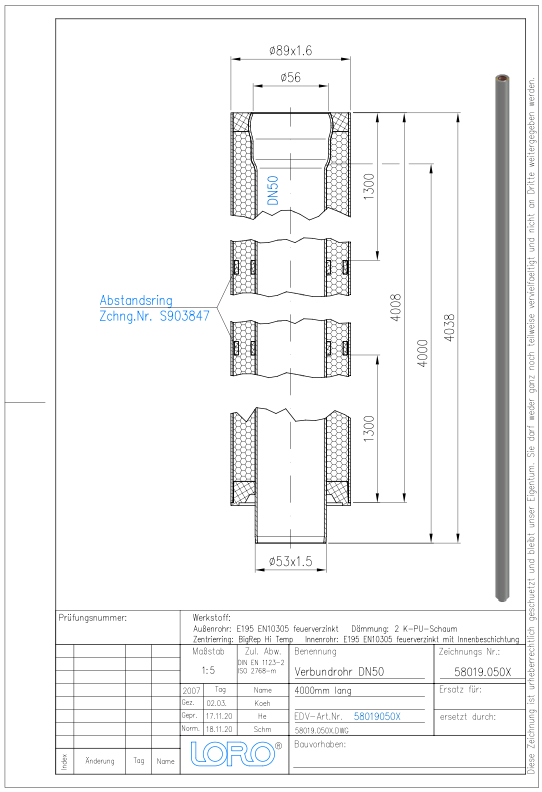

Artikeldata

EAN-kode	**4038088036174**
ETIM Klasse	**EC010225**
Nominel diameter	**DN 50**
Nominel længde/grad	**4000**
Ydermål (HxBxL)	**89 x 89 x 4038 mm**
Vægt	**25,00 Kg (STK)**
Produktgruppe	**3**
Toldtarifnummer	**73063012**
Materiale / Farve	**Stahl feuerverzinkt, Silber**

Brugsanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Downloads

Alles online

Installationsvejledning (PDF)
Måltegning (PDF)
Brochure (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM 3D (IFC)