## LORO-X COMPOSITE PIPE WITH 1 SOCKET 4000 MM DN 50

**LORO multilayer pipe 4000 mm DN 50**

### Description

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 4000 mm long, DN50

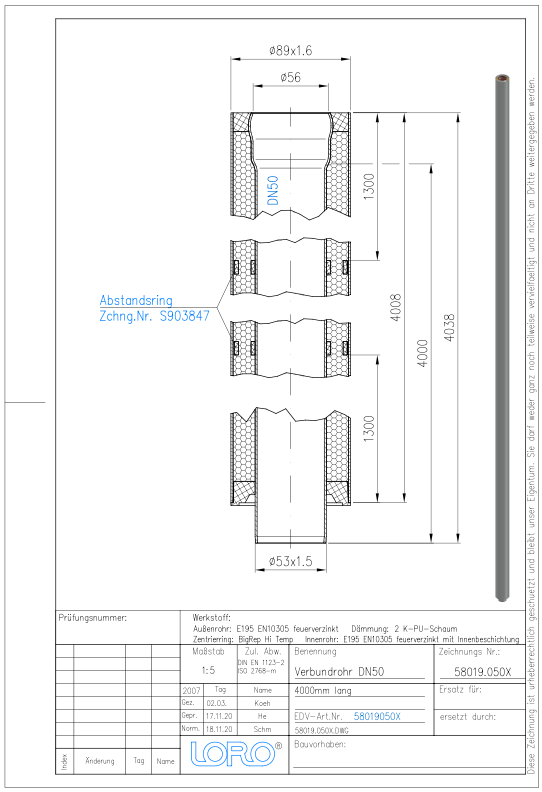


### Données de l'article

| | |
|---|---|
| Code EAN | 4038088036174 |
| Classe ETIM | EC010225 |
| Diamètre nominal | DN 50 |
| Longueur/degré nominal | 4000 |
| Dimensions extérieures (HxLxP) | 89 x 89 x 4038 mm |
| Poids | 25,00 Kg (STK) |
| Groupe de produits | 3 |
| Numéro tarifaire douanier | 73063012 |
| Matériau / Couleur | Stahl feuerverzinkt, Silber |

### Note d'utilisation

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

### Téléchargements

Alles online

Notice d'installation (PDF)
Dessin dimensionnel (PDF)
Brochure (PDF)
CAD 2D (DXF)
CAD 3D (DWG)
BIM 3D (STEP)
BIM 3D (IFC)