

LORO-X COMPOSITE PIPE WITH 1 SOCKET 4000 MM DN 50

LORO multilayer pipe 4000 mm DN 50

Beskrivelse

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 4000 mm long, DN50




Artikkeldata

EAN-kode	4038088036174
ETIM-klasse	EC010225
Nominell diameter	DN 50
Nominell lengde/grad	4000
Utvendige mål (HxBxL)	89 x 89 x 4038 mm
Vekt	25,00 Kg (STK)
Produktgruppe	3
Tolltariffnummer	73063012
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

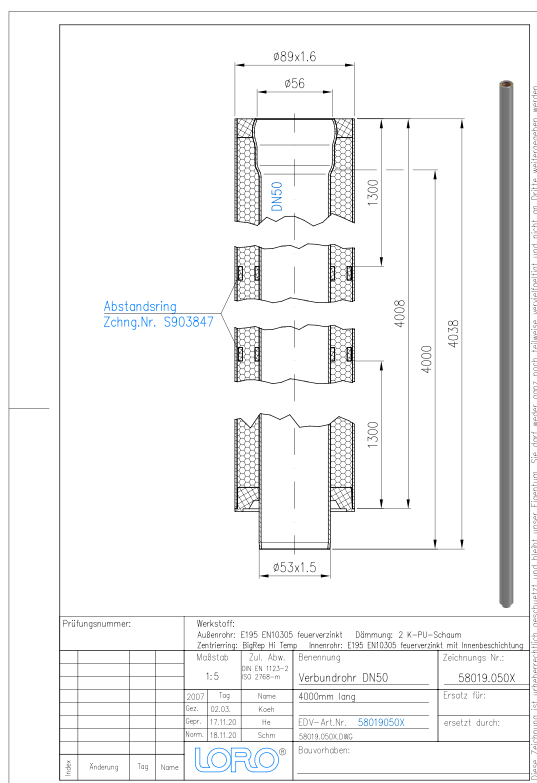

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Måltegning \(PDF\)](#)

CAD 3D (DWG)

[Brosjyre \(PDF\)](#)

BIM 3D (STEP)