

LORO-X COMPOSITE PIPE WITH 1 SOCKET 4000 MM DN 70

LORO-Composite Pipe 4000 mm DN 70

Kuvaus

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 4000 mm long, DN70




Tuotetiedot

EAN-koodi	4038088036181
ETIM-luokka	EC010225
Nimellishalkaisija	DN 70
Nimellispituus/-aste	4000
Ulkomitat (KxLxS)	102 x 102 x 4055 mm
Paino	35,50 Kg (STK)
Tuoteryhmä	3
Tullitariffin numero	73063012
Materiaali / Väri	Stahl feuerverzinkt, Silber

Käyttöohje

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

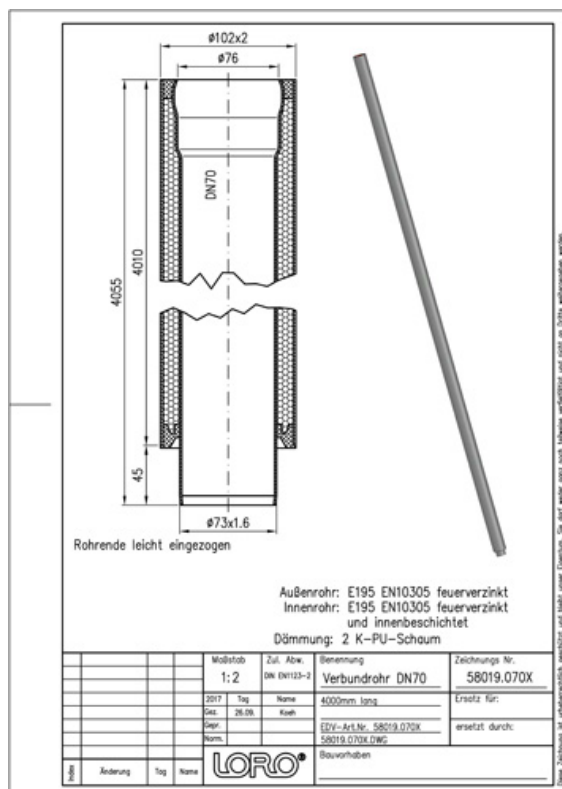

Lataukset



Alles online

[Asennusohje \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Mittapiirustus \(PDF\)](#)

CAD 3D (DWG)

[Esite \(PDF\)](#)

BIM 3D (STEP)