LORO-X COMPOSITE PIPE WITH 1 SOCKET 4000 MM DN 70

LORO-Composite Pipe 4000 mm DN 70

Popis

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 4000 mm long, DN70

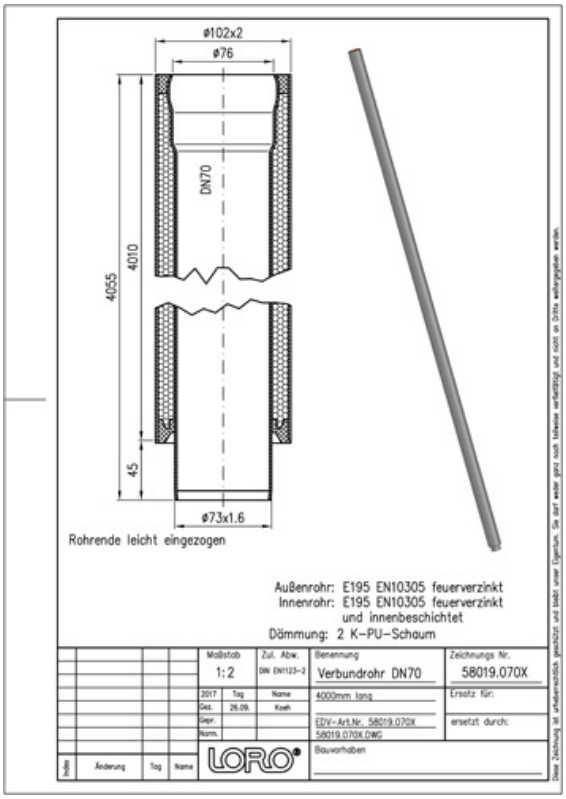

Údaje o artikli

EAN kód	**4038088036181**
ETIM trieda	**EC010225**
Menovitý priemer	**DN 70**
Menovitá dĺžka/stupeň	**4000**
Vonkajšie rozmery (VxŠxH)	**102 x 102 x 4055 mm**
Hmotnosť	**35,50 Kg (STK)**
Skupina produktov	**3**
Colný sadzobník	**73063012**
Materiál / Farba	**Stahl feuerverzinkt, Silber**

Pokyny na použitie

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Na stiahnutie

Alles online

Návod na montáž (PDF)
CAD 2D (DXF)
BIM 3D (IFC)
Rozmerový výkres (PDF)
CAD 3D (DWG)
Prospekt (PDF)
BIM 3D (STEP)