


LORO-X COMPOSITE PIPE WITH 1 SOCKET 4000 MM DN 70

LORO-Composite Pipe 4000 mm DN 70

Popis

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 4000 mm long, DN70

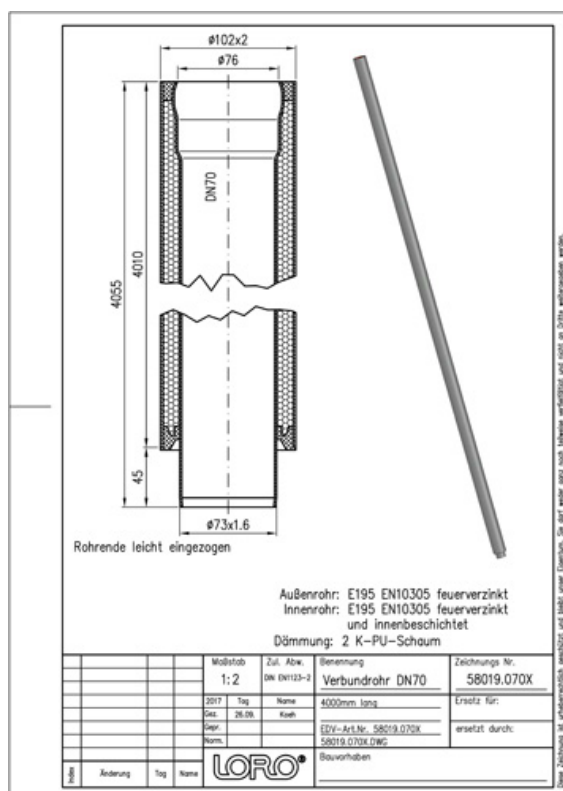

Údaje o artiklu

EAN kód	4038088036181
ETIM třída	EC010225
Jmenovitý průměr	DN 70
Jmenovitá délka/stupeň	4000
Vnější rozměry (VxŠxD)	102 x 102 x 4055 mm
Hmotnost	35,50 Kg (STK)
Skupina produktů	3
Celní sazebník	73063012
Materiál / Barva	Stahl feuerverzinkt, Silber

Pokyny k použití

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Ke stažení



Alles online

[Návod k instalaci \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Výkres rozměrů \(PDF\)](#)

CAD 3D (DWG)

[Prospekt \(PDF\)](#)

BIM 3D (STEP)