

## LORO-X COMPOSITE PIPE WITH 1 SOCKET

4000 MM DN 100

LORO-Composite Pipe 4000 mm DN 100

### Popis

LORO-X compound pipe consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 4000 mm long, DN100




### Údaje o artikli

|                           |                             |
|---------------------------|-----------------------------|
| EAN kód                   | 4038088036198               |
| ETIM trieda               | EC010225                    |
| Menovitý priemer          | DN 100                      |
| Menovitá dĺžka/stupeň     | 4000                        |
| Vonkajšie rozmery (VxŠxH) | 133 x 133 x 4070 mm         |
| Hmotnosť                  | 58,00 Kg (STK)              |
| Skupina produktov         | 3                           |
| Colný sadzobník           | 73063012                    |
| Materiál / Farba          | Stahl feuerverzinkt, Silber |

### Pokyny na použitie

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

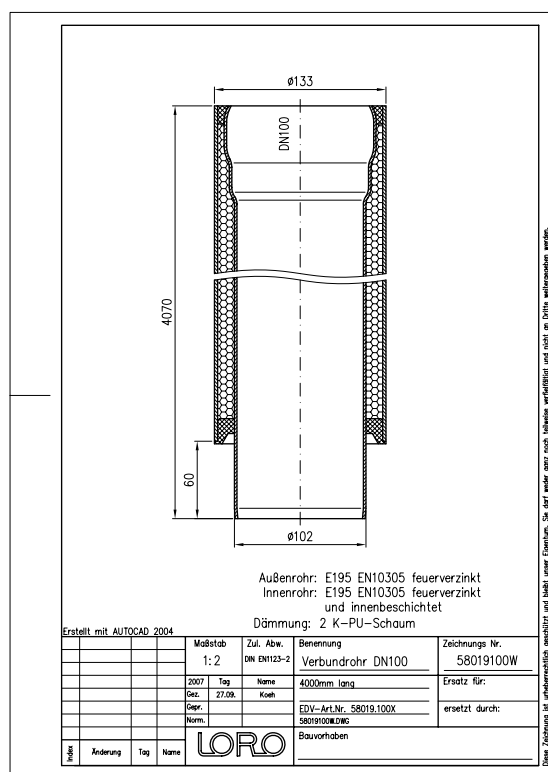

### Na stiahnutie



Alles online

[Návod na montáž \(PDF\)](#)  
[CAD 2D \(DXF\)](#)

[Rozmerový výkres \(PDF\)](#)  
[CAD \(DWG\)](#)

[Prospekt \(PDF\)](#)