LORO-X COMPOSITE BRANCH 87 DEGREE DN 50/50

LORO-Composite pipe branch 87 degrees DN 50/50

Popis

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 87 degrees, DN50

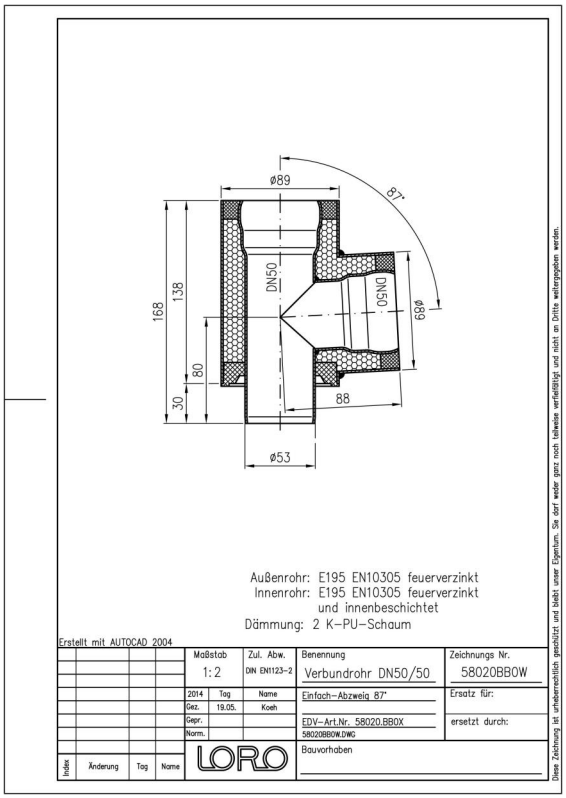

Údaje o artikli

EAN kód	**4038088024850**
ETIM trieda	**EC003025**
Menovitý priemer	**DN 50, DN 50**
Menovitá dĺžka/stupeň	**87**
Vonkajšie rozmery (VxŠxH)	**89 x 135 x 168 mm**
Hmotnosť	**1,30 Kg (STK)**
Skupina produktov	**3**
Colný sadzobník	**73089098**
Materiál / Farba	**Stahl feuerverzinkt, Silber**

Pokyny na použitie

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Däammschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Na stiahnutie

Návod na montáž (PDF)
Rozmerový výkres (PDF)
Prospekt (PDF)
CAD 2D (DXF)
CAD (DWG)

Alles online