

## LORO-X COMPOSITE BRANCH 87 DEGREE

## DN 125/125

LORO-Composite pipe branch 87 degrees DN 125/125

### Описание

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 87 degrees, DN125




### Данни за артикула

|                          |                             |
|--------------------------|-----------------------------|
| EAN код                  | 4038088024881               |
| ETIM клас                | EC003025                    |
| Номинален диаметър       | DN 125, DN 125              |
| Номинална дължина/градус | 87                          |
| Външни размери (ВxШxД)   | 168 x 283 x 360 mm          |
| Тегло                    | 11,70 Kg (STK)              |
| Продуктова група         | 3                           |
| Митнически тарифен номер | 73089098                    |
| Материал / Цвят          | Stahl feuerverzinkt, Silber |

### Забележка за употреба

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

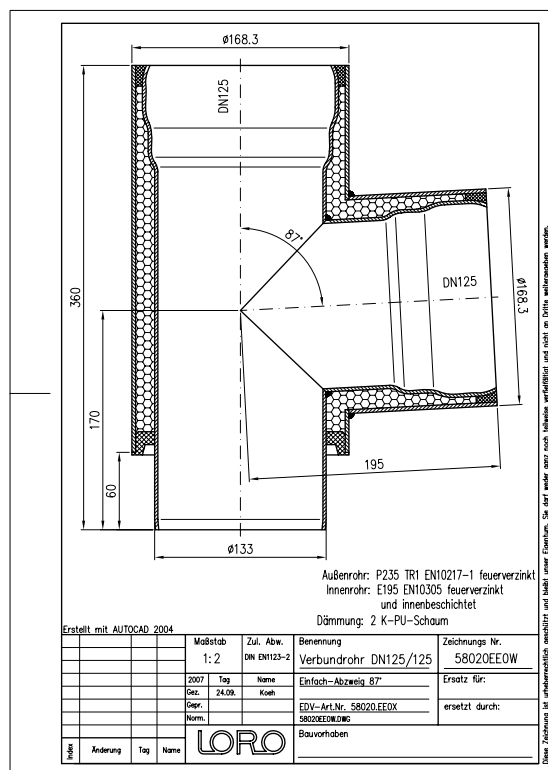

### Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[CAD чертеж \(PDF\)](#)

[CAD \(DWG\)](#)

[Брошура \(PDF\)](#)