


LORO-X COMPOSITE BRANCH 87 DEGREE

DN 125/125

LORO-Composite pipe branch 87 degrees DN 125/125

Opis

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 87 degrees, DN125

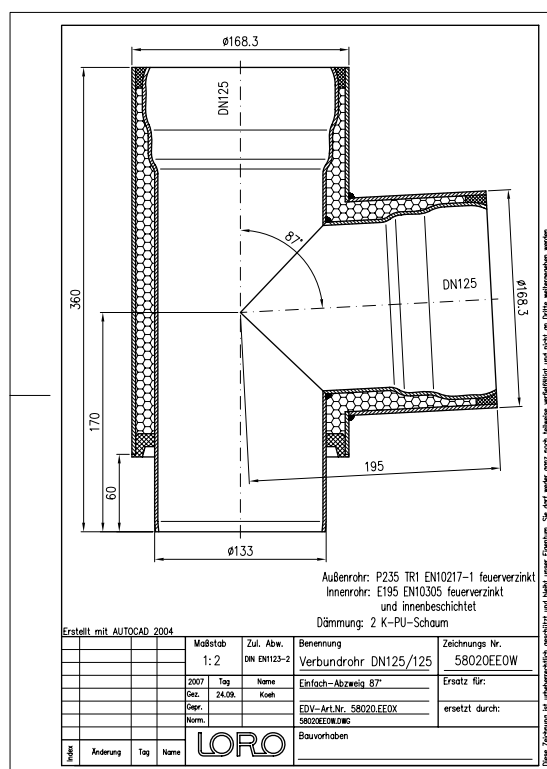

Dane artykułu

Kod EAN 4038088024881

Klasa ETIM EC003025

Średnica nominalna DN 125, DN 125

Długość/stożek nominalny 87

Wymiary zewnętrzne 168 x 283 x 360 mm (WxSxD)

Waga 11,70 Kg (STK)

Grupa produktów 3

Numer taryfy celnej 73089098

Materiał / Kolor Stahl feuerverzinkt, Silber

Wskazówki dotyczące użytkowania

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Pobieranie



Alles online

[Instrukcja montażu \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Rysunek wymiarowy \(PDF\)](#)
[CAD \(DWG\)](#)
[Broszura \(PDF\)](#)