


LORO-X COMPOSITE BRANCH 87 DEGREE

DN 150/150

LORO-Composite pipe branch 87 degrees DN 150/150

Description

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 87 degrees, DN150

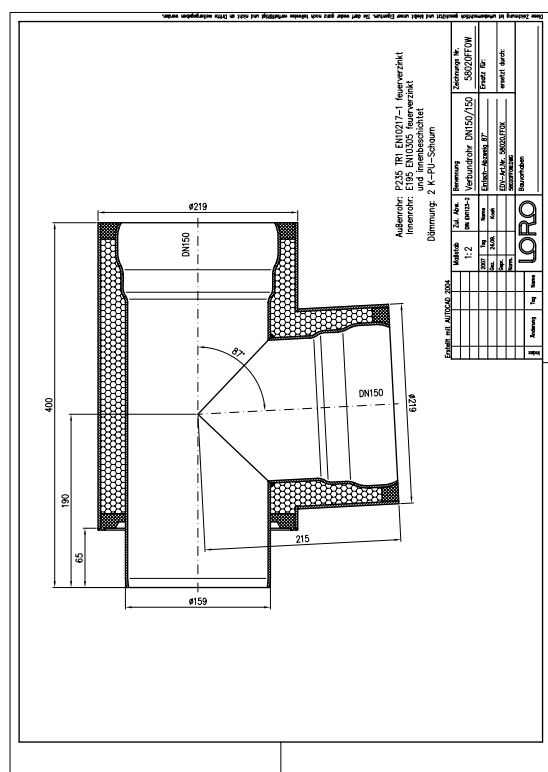

Données de l'article

Code EAN 4038088024898

Classe ETIM EC003025

Diamètre nominal DN 150, DN 150

Longueur/degré nominal 87

Dimensions extérieures (HxLxP) 219 x 330 x 400 mm

Poids 13,80 Kg (STK)

Groupe de produits 3

Numéro tarifaire douanier 73089098

Matériau / Couleur Stahl feuerverzinkt, Silber

Note d'utilisation

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Téléchargements



Alles online

[Notice d'installation \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Dessin dimensionnel \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochure \(PDF\)](#)