


LORO-X COMPOSITE BRANCH 87 DEGREE

DN 200/200

LORO-Composite pipe branch 87 degrees DN 200/200

Текст за тръжна документация

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 87 degrees, DN200

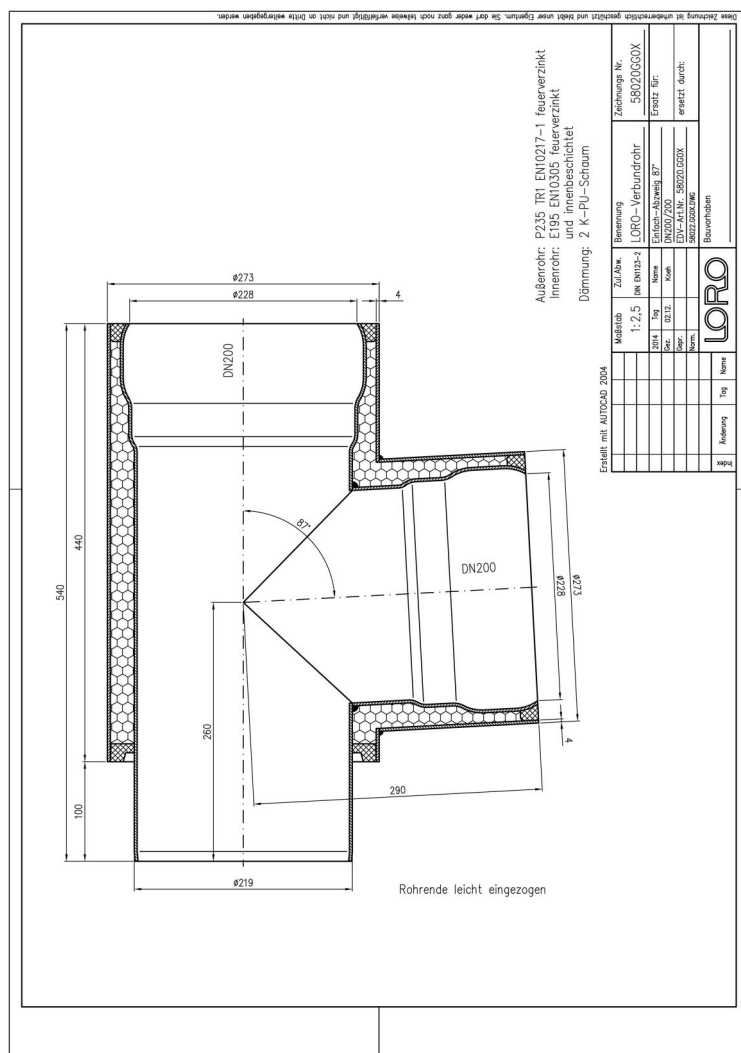

Данни за артикула

ЕАН код	4038088038109
ЕТИМ клас	EC003025
Номинален диаметър	DN 200, DN 200
Номинална дължина/градус	87
Външни размери (ВхШхД)	273 x 433 x 540 mm
Тегло	36,60 Kg (STK)
Продуктова група	3
Митнически тарифен номер	73089098
Материал / Цвят	Stahl feuerverzinkt, Silber

Забележка за употреба

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Изтегляния



Alles online

[Инструкция за монтаж \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[CAD чертеж \(PDF\)](#)

[CAD \(DWG\)](#)

[Брошура \(PDF\)](#)