


LORO-X COMPOSITE BRANCH 87 DEGREE

DN 200/200

LORO-Composite pipe branch 87 degrees DN 200/200

Texto para caderno de encargos

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 87 degrees, DN200

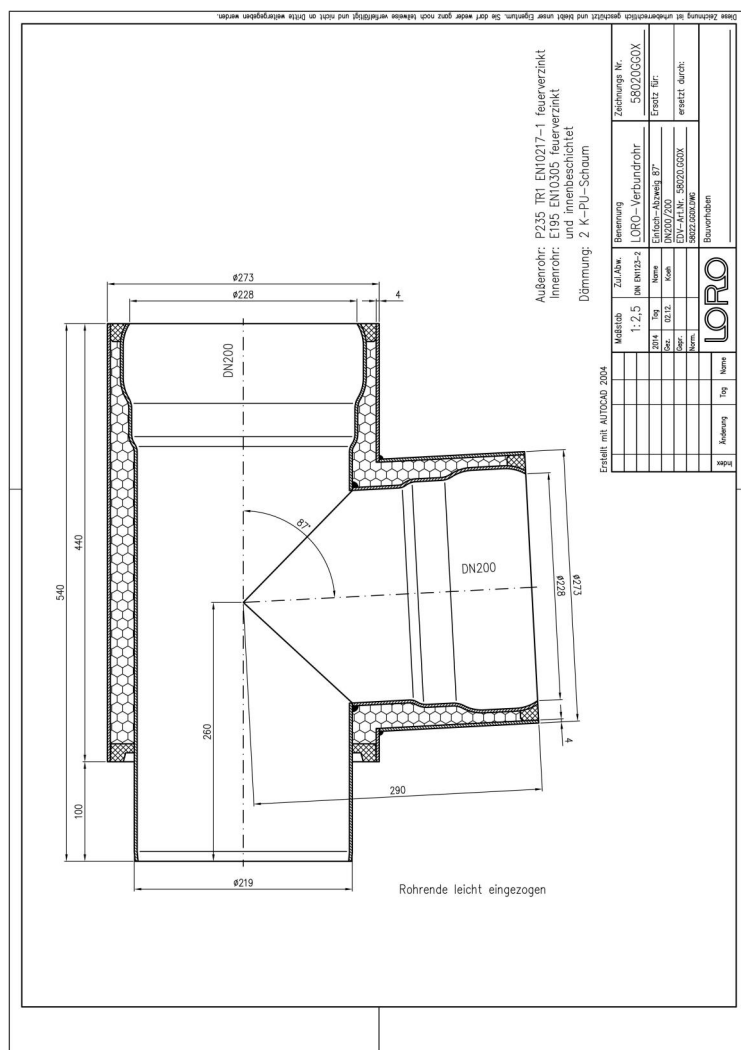

Dados do artigo

Código EAN 4038088038109

Classe ETIM EC003025

Diâmetro nominal DN 200, DN 200

Comprimento/grau nominal 87

Medidas exteriores (AxLxP) 273 x 433 x 540 mm

Peso 36,60 Kg (STK)

Grupo de produtos 3

Número de pauta aduaneira 73089098

Material / Cor Stahl feuerverzinkt, Silber

Nota de utilização

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[Desenho cotado \(PDF\)](#)

[CAD \(DWG\)](#)

[Brochura \(PDF\)](#)