

LORO-X COMPOSITE BRANCH 45 DEGREE

DN 40/40

LORO-Composite pipe branch 45 degrees DN 40/40

Descrizione

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 45 degrees, DN40




Date articol

Cod EAN	4038088049815
Clasă ETIM	EC003025
Diametru nominal	DN 40, DN 40
Lungime/grad nominal	45
Dimensiuni exterioare (ÎxLxA)	89 x 182 x 198 mm
Greutate	1,20 Kg (STK)
Grupă de produse	3
Număr tarif vamal	73089098
Material / Culoare	Stahl feuerverzinkt, Silber

Notă de utilizare

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

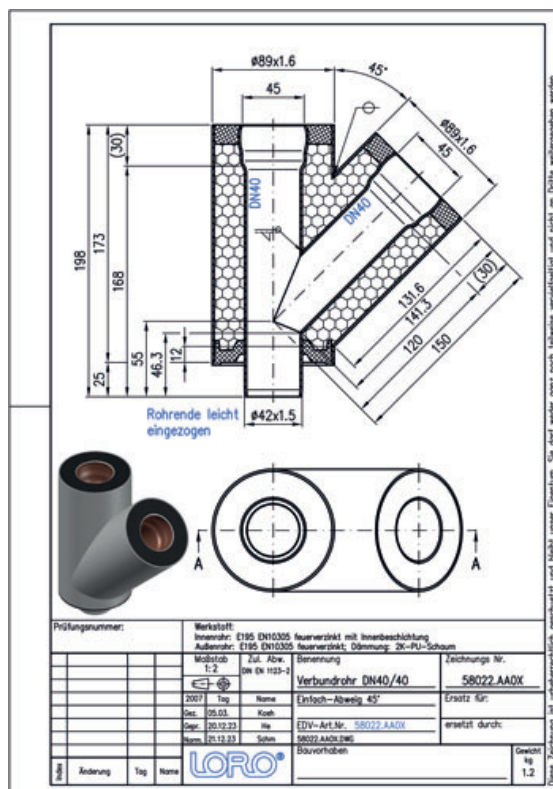

Descărcări



Alles online

[Instrucțiuni de montaj \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Desen CAD \(PDF\)](#)

CAD 3D (DWG)

[Brosură \(PDF\)](#)

BIM 3D (STEP)