

## LORO-X COMPOSITE BRANCH 45 DEGREE

## DN 40/40

LORO-Composite pipe branch 45 degrees DN 40/40

### Descrição

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 45 degrees, DN40




### Dados do artigo

|                            |                             |
|----------------------------|-----------------------------|
| Código EAN                 | 4038088049815               |
| Classe ETIM                | EC003025                    |
| Diâmetro nominal           | DN 40, DN 40                |
| Comprimento/grau nominal   | 45                          |
| Medidas exteriores (AxLxP) | 89 x 182 x 198 mm           |
| Peso                       | 1,20 Kg (STK)               |
| Grupo de produtos          | 3                           |
| Número de pauta aduaneira  | 73089098                    |
| Material / Cor             | Stahl feuerverzinkt, Silber |

### Nota de utilização

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

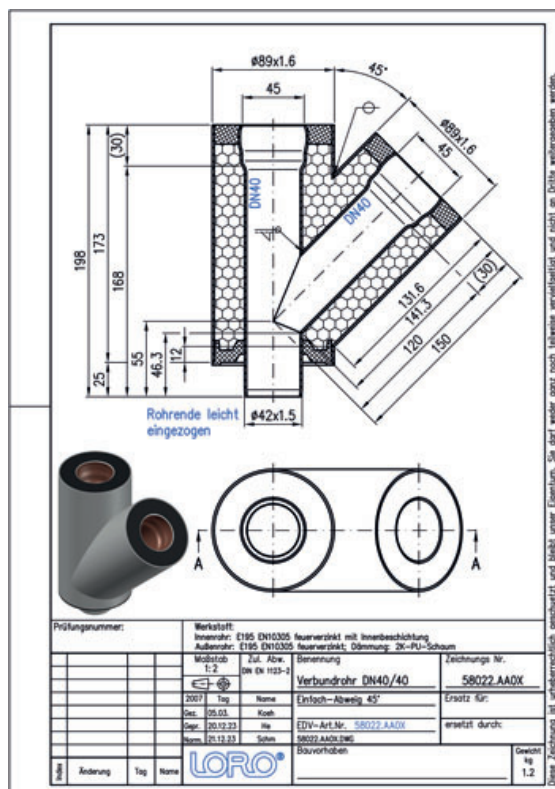

### Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Desenho cotado \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Brochura \(PDF\)](#)

[BIM 3D \(STEP\)](#)