

LORO-X COMPOSITE BRANCH 45 DEGREE

DN 40/40
LORO-Composite pipe branch 45 degrees DN 40/40

Beschrijving

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 45 degrees, DN40



Artikelgegevens

EAN-code 4038088049815

ETIM Klasse EC003025

Nominale diameter DN 40, DN 40

Nominale lengte/graad 45

Buitenafmetingen (HxBxL) 89 x 182 x 198 mm

Gewicht 1,20 Kg (STK)


Productgroep 3

Douanetariefnumme 73089098

Materiaal / Kleur Stahl feuerverzinkt, Silber

Gebruiksaanwijzing

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

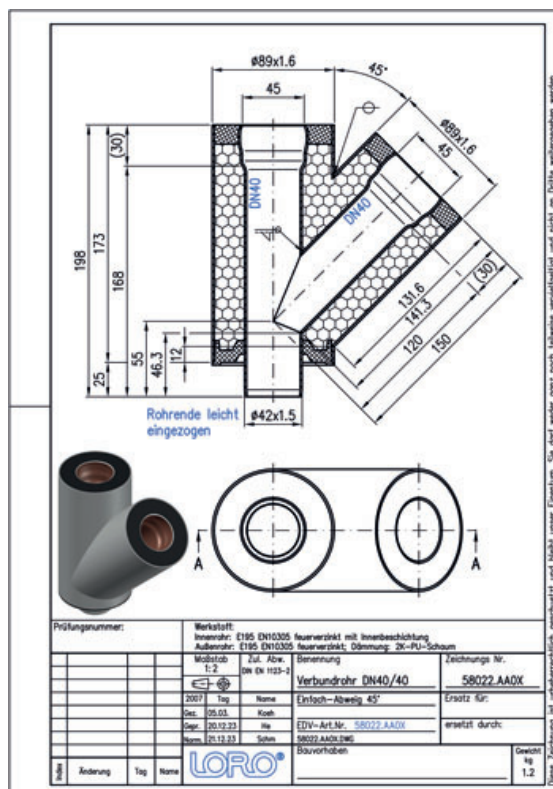

Downloads



Alles online

[Installatiehandleiding \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[BIM 3D \(IFC\)](#)
[Maattekening \(PDF\)](#)
[CAD 3D \(DWG\)](#)
[Brochure \(PDF\)](#)
[BIM 3D \(STEP\)](#)