

LORO-X COMPOSITE BRANCH 45 DEGREE

DN 40/40

LORO-Composite pipe branch 45 degrees DN 40/40

Descrizione

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 45 degrees, DN40




Dati articolo

Codice EAN	4038088049815
Classe ETIM	EC003025
Diametro nominale	DN 40, DN 40
Lunghezza/grado nominale	45
Misure esterne (AxLxP)	89 x 182 x 198 mm
Peso	1,20 Kg (STK)
Gruppo prodotti	3
Numero tariffa doganale	73089098
Materiale / Colore	Stahl feuerverzinkt, Silber

Note d'uso

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

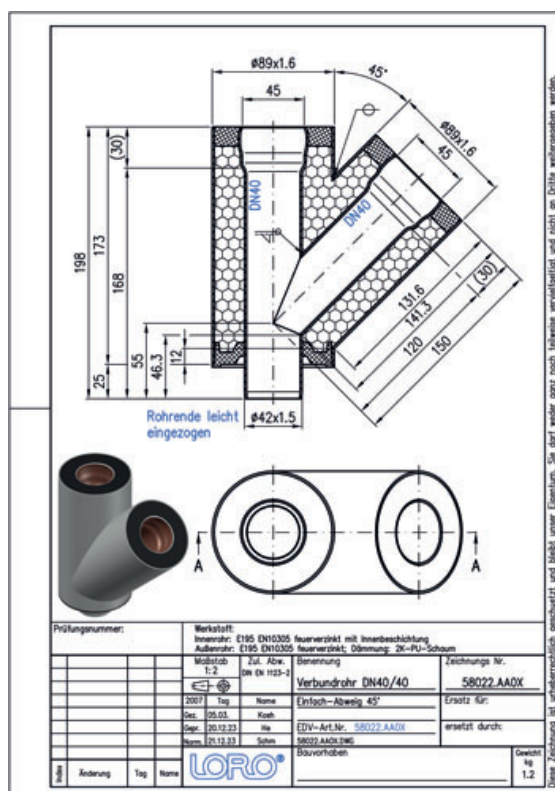

Download



Alles online

[Istruzioni di installazione \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Disegno dimensionale \(PDF\)](#)

CAD 3D (DWG)

[Brochure \(PDF\)](#)

BIM 3D (STEP)