

LORO-X COMPOSITE BRANCH 45 DEGREE DN 40/40

LORO-Composite pipe branch 45 degrees DN 40/40

Beskrivelse

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 45 degrees, DN40




Artikkeldata

EAN-kode	4038088049815
ETIM-klasse	EC003025
Nominell diameter	DN 40, DN 40
Nominell lengde/grad	45
Utvendige mål (HxBxL)	89 x 182 x 198 mm
Vekt	1,20 Kg (STK)
Produktgruppe	3
Tolltariffnummer	73089098
Materiale / Farge	Stahl feuerverzinkt, Silber

Bruksanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

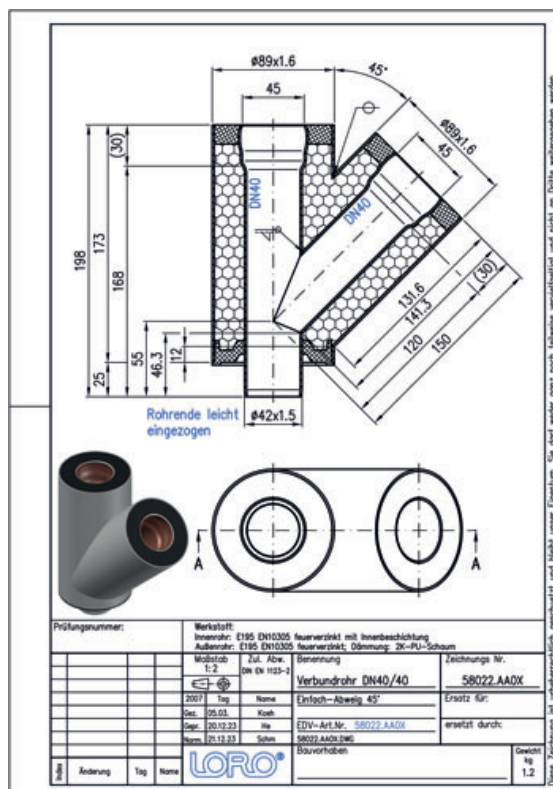

Nedlastinger



Alles online

[Monteringsanvisning \(PDF\)](#)

CAD 2D (DXF)

BIM 3D (IFC)

[Måltegning \(PDF\)](#)

CAD 3D (DWG)

[Brosjyre \(PDF\)](#)

BIM 3D (STEP)