

## LORO-X COMPOSITE BRANCH 45 DEGREE

**DN 50/50**
**LORO-Composite pipe branch 45 degrees DN 50/50**

### Beskrivning

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 45 degrees, DN50




### Artikeldata

|                     |                             |
|---------------------|-----------------------------|
| EAN-kod             | 4038088024904               |
| ETIM-klass          | EC003025                    |
| Nominell diameter   | DN 50, DN 50                |
| Nominell längd/grad | 45                          |
| Yttermått (HxBxL)   | 89 x 166 x 188 mm           |
| Vikt                | 1,60 Kg (STK)               |
| Produktgrupp        | 3                           |
| Tullnummer          | 73089098                    |
| Material / Färg     | Stahl feuerverzinkt, Silber |

### Användningsanvisning

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

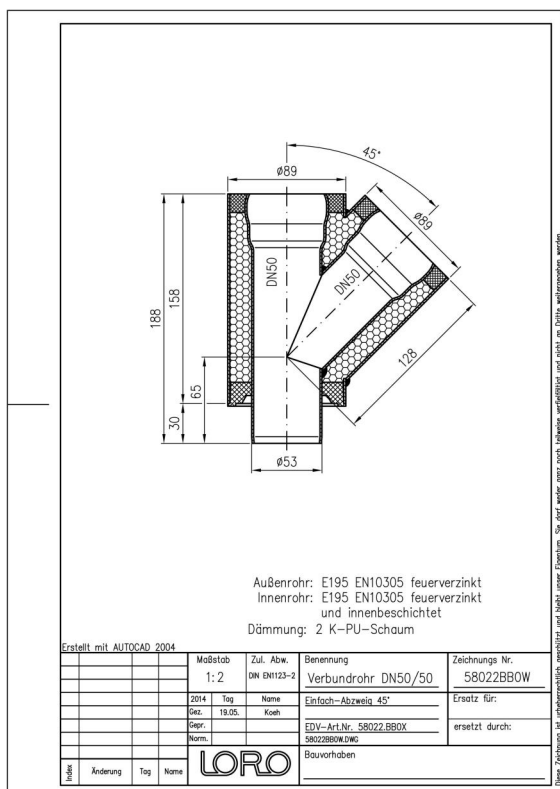

### Nedladdningar



Alles online

[Monteringsanvisning \(PDF\)](#)
[CAD 2D \(DXF\)](#)
[Måttitning \(PDF\)](#)
[CAD \(DWG\)](#)
[Broschyr \(PDF\)](#)