

LORO-X COMPOSITE BRANCH 45 DEGREE

DN 70/70

LORO-Composite pipe branch 45 degrees DN 70/70

Descrição

LORO-X compound pipe branch consisting of inner pipe (LORO-X pipe, made of steel, hot-dip galvanized, according to DIN EN 1123, with raised quality standard, with 2-chamber push-fit socket connection, building material class A1, dimensionally stable, break-proof, backflow-safe, long-life inside coating according to DIN EN ISO 2178 on the basis of a 2-component epoxy combination, colour: red-brown), insulation layer (PU hard foam B2, CFC free) and outer pipe (LORO-X pipe, made of steel, hot-dip galvanized), 45 degrees, DN70




Dados do artigo

Código EAN	4038088024911
Classe ETIM	EC003025
Diâmetro nominal	DN 70, DN 70
Comprimento/grau nominal	45
Medidas exteriores (AxLxP)	102 x 207 x 255 mm
Peso	2,70 Kg (STK)
Grupo de produtos	3
Número de pauta aduaneira	73089098
Material / Cor	Stahl feuerverzinkt, Silber

Nota de utilização

Doppelwandiges Abflußrohr, DN 40 - DN 150 bestehend aus: Innenrohr aus LORO-X Stahlabflußrohr, PU-Dämmschicht Baustoffklasse B2, FCKW-frei. Außenrohr aus LORO-X Stahlabflußrohr

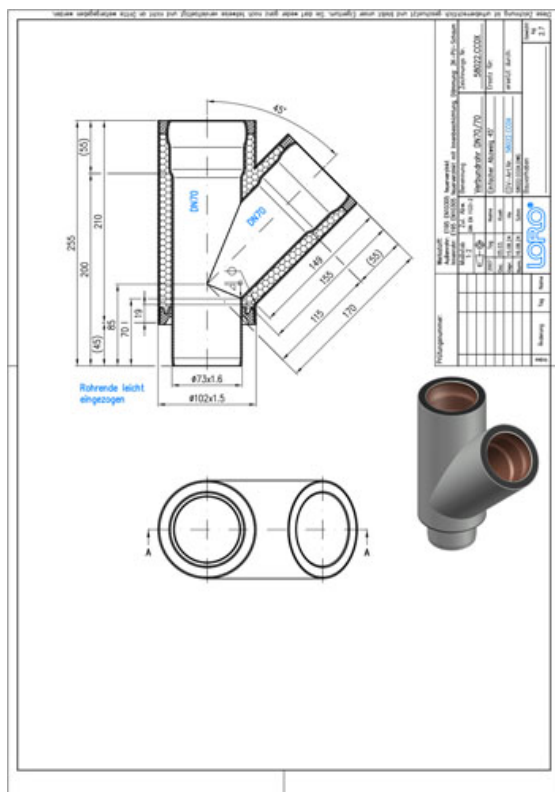

Transferências



Alles online

[Instruções de instalação \(PDF\)](#)

[CAD 2D \(DXF\)](#)

[BIM 3D \(IFC\)](#)

[Desenho cotado \(PDF\)](#)

[CAD 3D \(DWG\)](#)

[Brochura \(PDF\)](#)

[BIM 3D \(STEP\)](#)